



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification <sup>3</sup> :  H04L 9/00	A1	(11) International Publication Number: WO 83/ 04461  (43) International Publication Date: 22 December 1983 (22.12.83)
(21) International Application Number: PCT/US83/00030 (22) International Filing Date: 11 January 1983 (11.01.83) (31) Priority Application Number: 386,805 (32) Priority Date: 9 June 1982 (09.06.82) (33) Priority Country: US (71) Applicant: WESTERN ELECTRIC COMPANY, INC. [US/US]; 222 Broadway, New York, NY 10038 (US). (72) Inventors: EVERHART, Joseph, Robert ; P.O. Box 228, 3 Old Mill Road, Holmdel, NJ 07733 (US). OSBORN, Jeffrey, George ; 242 Madison Gardens, Old Bridge, NJ 08857 (US). (74) Agents: HIRSCH, A., E., Jr. et al.; Post Office Box 901, Princeton, NJ 08540 (US).		(81) Designated States: AT (European patent), AU, BE (European patent), CH (European patent), DE (European patent), FR (European patent), GB (European patent), JP, LU (European patent), NL (European patent), SE (European patent). Published With international search report.

## (54) Title: ENCRYPTION SYSTEM KEY DISTRIBUTION METHOD AND APPARATUS

## (57) Abstract

Encryption systems typically rely on the distribution of cipher keys between terminals for scrambling and unscrambling transmitted messages. Elaborate security precautions are necessary to protect the cipher keys since a compromise of the key could result in a compromise of the transmission. There is disclosed a key distribution method and apparatus which uses a channel (14, 15, 18) from identified terminals (A, B, X) to a central key distribution center (KDC) for the establishment, on a one-session basis, of the key which is to be used for the next session between those terminals. The key establishing link (16) is itself encoded using a cipher key which changes after each usage. Provision is made to verify, for each new connection, that a compromise has not priorly occurred.

## KDC CONFIGURATION

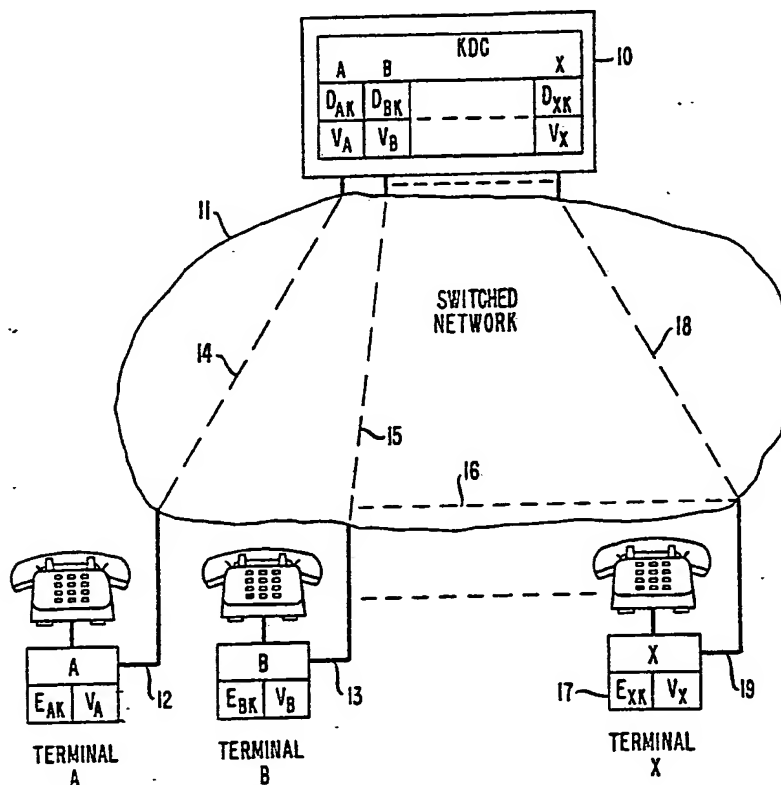

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	LI	Liechtenstein
AU	Australia	LK	Sri Lanka
BE	Belgium	LU	Luxembourg
BR	Brazil	MC	Monaco
CF	Central African Republic	MG	Madagascar
CG	Congo	MR	Mauritania
CH	Switzerland	MW	Malawi
CM	Cameroon	NL	Netherlands
DE	Germany, Federal Republic of	NO	Norway
DK	Denmark	RO	Romania
FI	Finland	SE	Sweden
FR	France	SN	Senegal
GA	Gabon	SU	Soviet Union
GB	United Kingdom	TD	Chad
HU	Hungary	TG	Togo
JP	Japan	US	United States of America
KP	Democratic People's Republic of Korea		

- 1 -

## ENCRIPTION SYSTEM KEY DISTRIBUTION

## METHOD AND APPARATUS

Background of the Invention

5 This invention relates to the establishment and distribution of cipher keys in a cryptographic system.

Cryptographic systems are now gaining favor, both for voice as well as data transmission. In such systems it is typically necessary that the parties to a particular  
10 transmission each have cryptographic keys to encrypt and decrypt the cipher transmissions. It follows that a compromise to a cryptographic key will in turn reduce the security of subsequent transmissions involving that key. Thus, great precautions must be taken to distribute the  
15 cryptographic keys among the system users. Such distribution, for example, using secure couriers to manually update the keys may be possible when the community of users is priorly known but becomes increasingly more difficult when either the number of parties is large or  
20 parties who seldom communicate with each other wish to do so. The responsibility for keeping the cryptographic key secure after distribution rests with each user and the longer the key remains effective the greater the risk of it becoming compromised.

25 Thus, from a practical point of view it is desirable to have the cryptographic key effective for a single session, requiring a new key for each new session. When couriers are used, however, this becomes costly and time consuming, especially when a party wishes to place  
30 many secure calls or have many secure sessions.

Attempts have been made to electronically distribute cryptographic keys between users from a key distribution center. One such example is shown in Rosenblum Patent No. 4,182,933, issued January 8, 1980.  
35 While such attempts have found some degree of success they all suffer from the problem that they are subject to

- 2 -

compromise because they usually rely on the security of the transmission media between the key distribution center and the terminal for the distribution of session key information. Thus, an intruder need only compromise the  
5 key distribution channel to obtain subsequent session keys. Elaborate systems have sometimes been established to detect such a compromise, all of which are either costly or minimally effective.

Another problem with key distribution centers is  
10 that the center can derive the information used to decrypt the secure data exchange between users and thus could theoretically monitor the secure session transmission.

#### Summary of the Invention

We have solved the above-identified problems by  
15 arranging a key distribution center (KDC) which communicates over a channel with the individual terminals. The channel, or data link, can be a dial-up telephone line, a packet-switched data network, dedicated lines, or other communications channel types, over which secure  
20 communication is possible. The terminals operate in conjunction with the KDC to establish a session key for secure transmission between two or more terminals. The session key at a terminal is constructed from information generated at that terminal in conjunction with information  
25 communicated from the KDC and is known fully only to the terminals involved in the session and not to the KDC. Thus, when two terminals have established a session key, they may securely communicate with each other for the duration of that session.

30 At the conclusions of the secure data exchange, the session keys should be destroyed, and when either station wishes to establish additional secure communication either between themselves or to other stations, a new session key will be established in cooperation with the  
35 KDC.

Both the terminal-KDC channel and the KDC-terminal channel, as mentioned above, are secure links in

**SUBSTITUTE SHEET**



- 3 -

that they are protected by cryptographic key information which is unique to each terminal and to the KDC on a one-call-only basis. Accordingly, whenever a connection is established between a terminal and the KDC, each has

5 information previously stored, referred to as terminal-unique key information, and this priorly stored information is used to establish both new KDC-terminal link keys, referred to as call-setup key information, and new session key information. During the establishment of the session

10 keys, the terminal and the KDC each modify their respective terminal-unique key information so that on a next call between the KDC and the same terminal, this new key information must be used in order to establish a secure communication path. The precise manner in which this

15 happens will be discussed hereinafter. In this manner, an intruder on the key distribution between a terminal and the KDC must be adding and substituting information on the channel from the beginning and must stay on the channel throughout several calls, since once the intruder leaves it

20 is possible to detect, at least by hindsight, that a compromise has occurred. This is a result of the fact that the intruder is substituting random information that may be monitored.

One aspect of our system is that an intruder, in

25 order to obtain useful information exchanged between two valid users of the system, must gain the terminal-unique information that is stored at the terminal, and he must also gain the terminal-unique information that is stored in the key distribution center for that specific terminal.

30 The intruder then, on the very next key exchange involving that terminal and the key distributing center, must actively participate, i.e., substitute his own generated key information on that channel. Then the intruder must also substitute information on the channel between the two

35 communicating terminals, and also must continue the above substitutions on the channels for an indefinite period of time or risk detection.

**SUBSTITUTE SHEET**

- 4 -

Brief Description of the Drawing

These attributes of our invention, together with the operation and utilization of the invention in a specific embodiment, will be more fully apparent from the illustrative embodiment shown in conjunction with the drawing which:

FIG. 1 shows an overall system using a KDC and several terminals;

FIG. 2 shows an implementation of the initial establishment of information in both the KDC and the terminal within a secure area;

FIGS. 3 and 4 show a flow chart detailing what occurs within each terminal;

FIG. 5 shows a flow chart detailing what occurs within the KDC;

FIGS. 6-19 show, in sequence, an implementation of the establishment of key information and control data within each terminal; and

FIGS. 21-28 show, in sequence, an implementation of the establishment of key information and control data within the KDC. In this system we have a variety of terminals.

General Description

FIG. 1 shows a number of terminals, A, B and X, connectable to each other and to KDC 10 via some transport network (e.g., public switched network). These terminals should be able to set up a secure channel between themselves in order to exchange secure information. In this process they must both communicate with the KDC. The transmission line 12 from terminal A is connected through link 16 to transmission line 13 to initiate a secure call to terminal B. Once the users decide to initiate a secure data exchange, each terminal sets up a transmission line, such as link 14 for terminal A, to the KDC.

An exchange of information will then occur from terminal A to the KDC and from terminal B to the KDC. Once the KDC has received both of these messages, it will

SUBSTITUTE SHEET



- 5 -

formulate two distinct messages that will be sent respectively to terminal A via link 14 and to terminal B via link 15. These individual messages will contain session key information, as well as other pertinent information described below. This session key information has originated at terminal A and at terminal B and is exchanged through the KDC. Once the exchange has taken place between the two terminals and the KDC, link 14, which is the key distribution link between terminal A and the KDC, is then taken down, and key distribution link 15 between the KDC and terminal B is taken down. Link 16, which is the session link between terminals A and B, is re-established. Further key information is exchanged based on the prior partial exchanges so as to derive independently at both terminals the session key, and finally using that session key information, data (i.e., digital data or digital voice) can be transmitted in secure fashion on data link 16.

Since further session information was derived between terminals A and B independent of the KDC, a malicious operator of the KDC cannot derive the key information need to decrypt the secure messages sent between terminals A and B without actively substituting information on the session channel.

Also, at this point, as will be seen, contained within the messages that were sent between the KDC and the terminals was new terminal-unique key information to secure the next key distribution between the terminals and the KDC. This new information is independent of the previous information and therefore is unique to it.

#### Detailed Description

Turning now to FIG. 2 the initial setup between the terminal and the KDC must be made in an authentic manner such that the information transported to the terminals from the KDC is not modified. One implementation is where the transport is made within a secured area, such as secured area 23. Since subsequent communications

**SUBSTITUTE SHEET**

- 6 -

between the KDC and each terminal depend upon the prior communication, it is important that at some period in time they both contain the proper information for start-up, and ideally this is done in the secured area so that there can  
5 be no breach of security.

On the initial system setup (based on the secured area implementation shown in FIG. 2) the terminals are brought within the secured area 23, and the KDC can generate terminal-unique key pairs for each terminal. The  
10 exact function of these key pairs will be described later. The KDC will generate a terminal-unique decryption key for each terminal and the corresponding encryption key. This encryption key must be placed in the terminal-unique key storage for each terminal with the corresponding decryption  
15 key stored in the terminal-unique key storage at the KDC under the address of that terminal. In addition, a random number,  $U_a$  for terminal A, unique to each terminal is stored in the verification information storage at the KDC also at the address of this terminal. This same random  
20 number must be loaded and stored in the verification information storage in the terminals and will be used for a verification check on the first call setup to the KDC.

FIGS. 3 and 4 are flow charts representing the action that occurs within a terminal, for example,  
25 terminal A.

FIG. 5 is a flow chart representing what actions occur within the key distribution center.

The discussion which will follow is a discussion with respect to a time sequence between the terminal and  
30 the KDC to illustrate both how terminal-unique keys are updated, and how call-setup and session keys are distributed. This discussion will occur with respect to FIGS. 6 through 28. FIGS. 6 through 19 show the apparatus within the terminal and show on a step-by-step basis how  
35 the call-setup keys and the session keys are established. FIGS. 20 through 28 show the apparatus within the KDC, each figure showing a specific operational aspect of the

**SUBSTITUTE SHEET**



- 7 -

establishment of the keys.

Turning now to FIG. 6, we will discuss the specific apparatus used in the terminals. The actual generation of the numbers will be discussed hereinafter.

- 5 Apparatus 72 is a random number generator which is a device or algorithm that produces bits (zeros and ones) that are equally likely to occur. This generation may be based upon a noisy diode and any number of algorithms can be used to attain statistically independent output of 0's and 1's.
- 10 The more equally likely these random number generators are, i.e., the more random this function is, the higher the security level will be. The output of the random number generator is a serial stream of zeroes and ones where the correlation between one or a group of bits is zero. The
- 15 bidirectional asymmetric key generator, apparatus 73, takes as input a random number from random number generator 72 and will compute an encryption key and the matching decryption key such that the encryption key cannot be derived from the decryption key and vice versa. The
- 20 generation of these keys as an example could be done in accordance with the RSA algorithm, as described by Rivest, Shamir, and Adleman in a paper entitled, "A Method for Obtaining Digital Signatures and Public Key Crypto Systems," which publication is hereby incorporated by
- 25 reference, which appeared in CACM, Vol. 21, No. 2, February, 1978, on pages 120-126.

Apparatus 74 implements a bidirectional asymmetric cryptographic algorithm (e.g., the RSA algorithm) that is, a cryptographic algorithm based on two

30 distinct keys where the encryption key cannot be derived from the decryption key and vice versa. Apparatus 74 has two inputs (I and K) and one output (O). The input I is the bits to be encrypted or decrypted. The input K is the key, either encryption or decryption (the RSA algorithm

35 performs the same function regardless of encryption or decryption). The output will be the inputted bits encrypted or decrypted with the supplied key. This

**SUBSTITUTE SHEET**



- 8 -

algorithm is also described in the aforementioned paper. Functionally, apparatus 75 is the embodiment of two functions  $f$  and  $g$  such that: given  $f(R, P)$  and  $P$ , one cannot determine  $R$ ;  $g(R_1, f(R_2, P), P) = g(R_2, f(R_1, P), P)$ ; and given  $f(R_1, P)$ ,  $f(R_2, P)$ , and  $P$  one cannot determine  $R_1$ ,  $R_2$ , or  $g(R_1, f(R_2, P), P)$ .

Apparatus 75 performs the above functions via, for example, the Diffie-Hellman algorithm, which is described in a paper by Diffie and Hellman entitled "New  
10 Directions in Cryptography," published by the IEEE Transactions on Information Theory, Vol. IP-22, November, 1976, on pages 644-655, which is hereby incorporated by reference. The input to this algorithm is a base  $Y$ , a modulus  $Q$  and an exponent  $EXP$ . The output is  $Y$  raised to  
15 the  $EXP$  power modulus the  $Q$ . The functions  $f$  and  $g$  are the same as discussed above in this example.

The storage requirements are depicted by registers 71, 70 and 76. These are the semi-permanent register 71 which contains both the verification  
20 information  $V_a$  and the terminal-unique key information  $E_{ak}$  used to encrypt messages to the KDC. Temporary register 70 can be in any state initially and is used during the interaction with the KDC on a secure call setup. The address register permanently contains the address (i.e., a  
25 public piece of information that uniquely identifies  $A$  to the KDC) of the terminal (terminal  $A$  in this case) where it is located. During a secure session (or call) setup, the address register will also contain the address of the terminal which is being called. The registers containing  
30 verification information and encryption and decryption information may vary in size depending upon the specific algorithm used but in this example should be on the order of 1,000 bits each. Information pertaining to the symmetric session key and the random number should be on  
35 the order of 100 bits, and the address information will be dependent upon a terminal numbering plan both unique and known to the KDC. For example, it could be the telephone

SUBSTITUTE SHEET



- 9 -

number of the specific terminal or it could be the serial number of the terminal.

Turning to FIG. 20, we will now discuss the working of the modules within the key distribution unit.

5 The address register at the KDC, register 200, performs the same function as the address register at the terminal. The RSA function at the KDC, apparatus 210, performs the same function as the RSA function at the terminal, as previously described. The random number generator, apparatus 211,  
10 performs the same function as the random number generator at the terminal previously mentioned. The generator of the encryption and decryption keys apparatus 212 has the same function as described previously in the terminal. Apparatus 213 is a generator of the parameters used as  
15 inputs to the apparatus 75 described previously. For this particular example these parameters are the base and modulus for the Diffie-Hellman algorithm. It requires as input the output of the random number generator, apparatus 211. The method of generation is described in  
20 the aforementioned paper by Diffie.

There is a semi-permanent storage at the KDC, registers 214 and 216, which stores verification information Va and terminal-unique decryption key information Dak between calls. Semi-permanent  
25 registers 215 and 217 are used to store information during the call setup progress. These registers have the same functions as described previously for the terminal.

#### System Operation

The operation of the system will now be explained  
30 beginning with FIG. 3. Initially the key management equipment in the terminal will be in the wait state until a request is received from the terminal controller processor to initiate a secure call. At this point, as discussed, there is stored in the terminal the terminal-unique  
35 encryption key that will be used to encrypt information that is sent to the KDC. Also stored is the verification information. These two pieces of information were stored

**SUBSTITUTE SHEET**



- 10 -

from the last call (or from the initial setup) that was made by this terminal. This is shown in FIG. 6 as Va and Eak.

Once a request is received to initiate a secure call, the address of the called party must be given to the key management equipment via the controller processor. This is seen in FIG. 3, box 31. At this point, there are generated new call-setup keys. This is shown in box 32 and in FIG. 7 as Eka and Dka. In box 33 there is shown the generation of partial session keys that will be used to encrypt data on the link from terminal B to terminal A. This is shown in FIG. 8 as Eba and DbA.

At this point, the verification information is updated using the keys that were just generated. The update function is specified as follows:

$$Val' = f(Val, E1) \text{ and } Va2' = f(Va2, E2)$$

where ' denotes updated and  $ValVa2 = Va$ . Va is the stored verification information and the E's are the just-generated encryption keys. The properties of f are as follows:

- (1) for every V, E1, E2:  $f(V, E1) \neq f(V, E2)$  where  $E1 \neq E2$ ;
- (2) for every V1, V2, E:  $f(V1, E) \neq f(V2, E)$  where  $V1 \neq V2$ ;
- (3) given V and  $V' \neq f(V, E)$  it is difficult to determine E; and
- (4) in the case where E is an asymmetric encryption key, D cannot be determined from E.

For this example,  $Va' = Val'|Va2'$  where  $Va = Val|Va2$ , Val' is equal to Val encrypted with Eka, and Va2' is equal to Va2 encrypted with Eba. This update process is depicted in FIG. 9. The first half of the verification information Val is read from storage and provided as an input to the RSA algorithm. The key that is used to encrypt this information is the call-setup key, Eka, that was just generated. This becomes Val' and overwrites Val as seen in

SUBSTITUTE SHEET



- 11 -

FIG. 10. Next, the second half of the verification information Va2 is encrypted using Eba just generated. The result Va2' overwrites Va2 in the storage register. This is shown in FIG. 3, box 34, and in summary, the updated  
5 verification information Va" is the verification information stored from the previous call, or given to the terminal on the initial setup from the KDC, where half is encrypted using the encryption part of the partial session key generated on this call and the other half is encrypted  
10 using the call-setup key for that call.

At this point, as shown in box 36, FIG. 3, and in FIG. 11, the message can be formatted to the KDC. The contents of this message are the encryption parts of the two keys that were just generated. Both the partial  
15 session key to be established between terminal A and B, Eba, and the new call-setup key Eka are encrypted using the terminal-unique encryption key Eak stored from the previous call from the KDC to the terminal or given to the terminal on the initial setup. At this point, the information that  
20 can be destroyed from the terminal is the terminal-unique encryption key, Eak, stored at the terminal from the previous call, and both the call-setup encryption key, Eka, and the partial session encryption key, Eba, that were generated by the terminal. The encrypted message is then  
25 appended to the address, A, of the originating terminal followed by the address, B, of the called terminal. This message is now sent to the KDC.

The terminal now will enter a wait state waiting for the information to be received from the KDC. This is  
30 depicted in box 37 of FIG. 3.

As shown in FIG. 5, the KDC will be in a wait state until a message is received from terminal A. This is shown in FIG. 5, box 50. Once the message is received, the KDC reads the address information within the message into  
35 the address register which gives it the index of the decryption key that must be used to decrypt the message. The KDC has in its storage from the previous call the

**SUBSTITUTE SHEET**

- 12 -

matching verification information for each terminal and the terminal-unique decryption key for each terminal. This is depicted in FIG. 20, boxes 214 and 216.

5 The message from terminal A is decrypted using the terminal-unique decryption key corresponding to that terminal, Dak. The keys, both the new call setup key Eka and the partial session key Eba (to be distributed to terminal B) is temporarily stored in the KDC memory as depicted in FIG. 21.

10 At this point, as shown in FIG. 22, the KDC can update its verification information in the exact same manner as the terminal. This is done by encrypting each half of the stored verification information Va with the received session key information Eba and the received  
15 call-setup key information Eka, shown in FIG. 23. This produces the update verification information Va\*.

The key distribution center, as shown in FIG. 24, will now generate a bidirectional asymmetric encryption/decryption key pair, Eak', Dak'. The primes  
20 denote updated information. Eak' will be distributed to terminal A to be used on the next call setup to the key distribution center. The decryption key Dak' overwrites the decryption key Dak that was stored from the previous call.

25 Two other pieces of information are also generated at this time. These are the parameters that will be used by the terminals to create symmetric session keys; in this case they are the parameters of the Diffie-Hellman algorithm. One is the base Y and the other is the  
30 modulus Q as previously described. Functionally, the amount of information that is generated at the KDC and sent to each terminal may vary depending upon the precise algorithm. This information is stored in temporary storage and will be used as part of the message sent back to both  
35 terminal A and terminal B. This generation process is depicted in FIG. 25 and refers to the flow chart box 55, FIG. 5. By this point, as shown in FIG. 26, the KDC must

SUBSTITUTE SHEET

BUREAU  
OMPI  
WIPO

- 13 -

have received a message from terminal B in order to complete the call to terminal A. If not, the KDC process for terminal A must wait until the process for terminal B has reached this point. This is so it can give terminal A  
5 the partial session key information Eab generated at terminal B and also to be able to give terminal B the partial session key Eba generated at terminal A. Coordination between the processes must take place so that the same parameters generated by one process overwrites the  
10 parameters generated by the other process. This insures that the parameters sent to the terminals for the purpose of generating symmetric session keys are the same.

Once the internal exchange is made between the A registers and the B registers to coordinate the information  
15 inside the key distribution center, the messages can now be formatted for the terminals. This is shown in FIG. 27. The message to terminal A will consist of the new terminal-unique key information Eak' that will be used on a subsequent call to the KDC. It will also consist of the  
20 partial session key information Eab which it received from terminal B. It will also consist of the verification information  $Va^n$  or a known reduction of  $Va^n$  in terms of the number of bits. It will also consist of the base Y and the modulus Q of the Diffie-Hellman algorithm. These five  
25 pieces of information will be encrypted using the call-setup key Eka received in the message from terminal A. The KDC destroys Eka, Eba, Eak', Y, and Q corresponding to terminal A and destroys Ekb, Eab, Ebk', Y, and Q corresponding to terminal B. The KDC will then send this  
30 output message back to terminal A. An analogous encrypted message is sent from the KDC to terminal B. At this point the KDC is finished with its processing.

FIG. 28 shows the configuration of the KDC after the call to terminal A has been dropped. The KDC has  
35 updated verification information  $Va^n$  and updated terminal-unique decrypt key information Dak' which will be used on a subsequent call between terminal A and the KDC.

**SUBSTITUTE SHEET**

- 14 -

Referring back to the flow chart, FIG. 3, for terminal A, the key management equipment at the terminal has been in a wait state while the KDC has been functioning. FIG. 12 shows the key information stored at the terminal during this wait state. It is the updated verification  $V_a$  information and both decrypt keys  $D_{ka}$  and  $D_{ba}$  corresponding to the previously generated encryption keys.

FIG. 13 shows how the information received from the KDC is used in accordance with the box 38, FIG. 3. The call-setup decryption key  $D_{ka}$  is used to decrypt the message received from the KDC. The five values (previously discussed) sent from the KDC are now used in the following way. The first piece of information is the new distribution key  $E_{ak'}$  that is stored in the semi-permanent register 71 and will be used on a following call made from this terminal to the KDC. It is the updated terminal-unique encryption key. The second piece of information is the partial session key  $E_{ab}$  which was generated at B and sent through the KDC to terminal A. The third piece of information is the updated verification information  $V_a$ , which can now be compared with the verification information stored at terminal A. The fourth and fifth pieces of information are the parameters to the Diffie-Hellman algorithm, the base  $Y$  and the modulus  $Q$ , which terminal A stores in temporary storage.

Referring to FIG. 4, box 40, at this point the terminal will compare the verification information it received from the KDC and either the verification information which is presently stored or some known reduction of that verification information - FIG. 14. If this matches, then the process will continue as normal. If this does not match, an alarm could be given to the terminal controller processor of a potential intruder threat on a previous call.

Assuming a success of the compared verification, the terminal can now take down the channel to the KDC and

**SUBSTITUTE SHEET**



- 15 -

establish a channel to terminal B, if not already established. At this point, terminal A and terminal B can communicate data securely using the asymmetric session keys Eab and Eba. If a symmetric session key is needed, the following steps can be taken. The calculation of the message to be sent to terminal B is shown in FIG. 15. First, the base Y and modulus Q of the Diffie-Hellman algorithm are used along with a random number Ra generated by the random number generator 72. These inputs are given to the Diffie-Hellman algorithm 75 and the output is then an input to the RSA function 73. The random number Ra is also stored in temporary storage. Eab is used as the key to the RSA function 73. At this point the session key information Eab received from terminal B and the base number Y may be destroyed. The output of the RSA algorithm is sent to terminal B.

Terminal A's key management equipment will now enter a wait state shown in FIG. 4, box 44, waiting for a message to be returned from terminal B. The idle state is depicted in FIG. 16 and in storage is the decrypt session key Dab which terminal A generated, the modulus Q of the Diffie-Hellman algorithm generated by the KDC and the random Ra number that was generated by terminal A.

As shown in FIG. 17, upon receipt of the message from terminal B, terminal A will decrypt the message using its decryption key Dba stored from the initial generation of the partial session key. Dba can now be destroyed. The output of this will be fed into the Diffie-Hellman algorithm as the base. The exponent will be the random number Ra which was priorly generated and the modulus Q is also input into the algorithm. The output of the Diffie-Hellman algorithm will be symmetric session key information which will equal the session key information that terminal B has calculated. Q and Ra can now be destroyed.

At this point, terminals A and B have established symmetric session key information between themselves that is not derivable by the KDC. This key information may be

**SUBSTITUTE SHEET**

- 16 -

used in a symmetric key algorithm like the Data Encryption Standard (DES) to encrypt data. What is stored now in the terminal until the next request for a secure session (or call), as shown in FIG. 18, is the updated verification  
5 information  $V_a$  and the terminal-unique key  $E_{ak}$  which it received from the KDC to be used to encrypt the next message to the KDC.

It should be noted that the actual generation of the desired data at the terminal and at the KDC is  
10 operative under control of a computer processor and is programmed in accordance with the flow charts shown in FIGS. 3-5 to perform the sequence of data transfers detailed herein. Such a processor, while not shown, can be any one of several well-known microprocessors, such as for  
15 example, the Intel 8086 microprocessor, working in conjunction with the terminal and KDC apparatus shown and detailed herein above.

It should also be noted that one skilled in the art could use different encryption algorithms and different  
20 equipments to achieve the same results disclosed herein without departing from the spirit and scope of our invention.

SUBSTITUTE SHEET



- 17 -

Claims

1. A key distribution method for communicating cipher keys between two terminals via a key distribution center, KDC, said method comprising
- 5 establishing between any one terminal and said key distribution center a terminal-unique cipher key, cooperating between said KDC and said one terminal on a subsequent connection between said KDC and said one terminal to establish a session key for use by said one
- 10 terminal in a subsequent secure transmission between said one terminal and a second terminal, and changing in response to said subsequent connection between said one terminal and said KDC said priorly established terminal-unique cipher key.
- 15 2. The invention set forth in claim 1 wherein said session key is generated from the asymmetric exchange of information between said one terminal and said KDC plus the subsequent exchange of information between said first and second terminals.
- 20 3. The invention set forth in claim 2 wherein said session key at said one terminal is random with respect to information at said KDC.
4. The invention set forth in claim 2 wherein said session key at said one terminal is underivable with
- 25 respect to any information at said KDC.
5. A key distribution center for controlling the dissemination of session cipher keys between remotely located terminals, said center arranged for switched access to a plurality of said terminals, said center comprising
- 30 means for establishing communication cipher keys between said center and each said terminal having access thereto, each cipher key unique to each said terminal, means operative when one of said terminals accesses said center for bidirectional asymmetrically
- 35 exchanging information with said accessed terminal using, as a foundation for said exchange, said priorly established communication cipher keys, and

SUBSTITUTE SHEET



- 18 -

means responsive to said exchanged information for communicating to said terminal information allowing said terminal to establish a session cipher key for use with an identified other terminal also having access to said center.

6. The invention set forth in claim 5 wherein said key distribution center further comprising means for changing said established communication cipher keys as a result of said exchanged information.

7. The invention set forth in claim 5 wherein said cipher key establishing means uses information from a prior transmission from a particular terminal for establishing said cipher keys to said particular terminal.

8. The invention set forth in claim 5 wherein said exchanged information includes information generated in part at said center for the random generation of said session key allowing said session key to be underivable with respect to any information at said center.

9. A key distribution center for controlling the distribution of cipher control information among a number of terminals, said center comprising

means for individually exchanging encoded information between any of said terminals, said exchange for any particular terminal based partially upon a last information exchange between said particular terminal and said center,

means for identifying at least two terminals where encrypted session information is to be exchanged and for accepting from said identified terminals certain encryption control information, and

means for modifying, according to a pre-established pattern, accepted information from said identified terminals and for communicating said modified information to the other of said terminals so as to allow each of said terminals to thereafter establish, independent of any information available at said center, a cipher key allowing said session information to be encrypted.


SUBSTITUTE SHEET



1/17

FIG. 1


## KDC CONFIGURATION

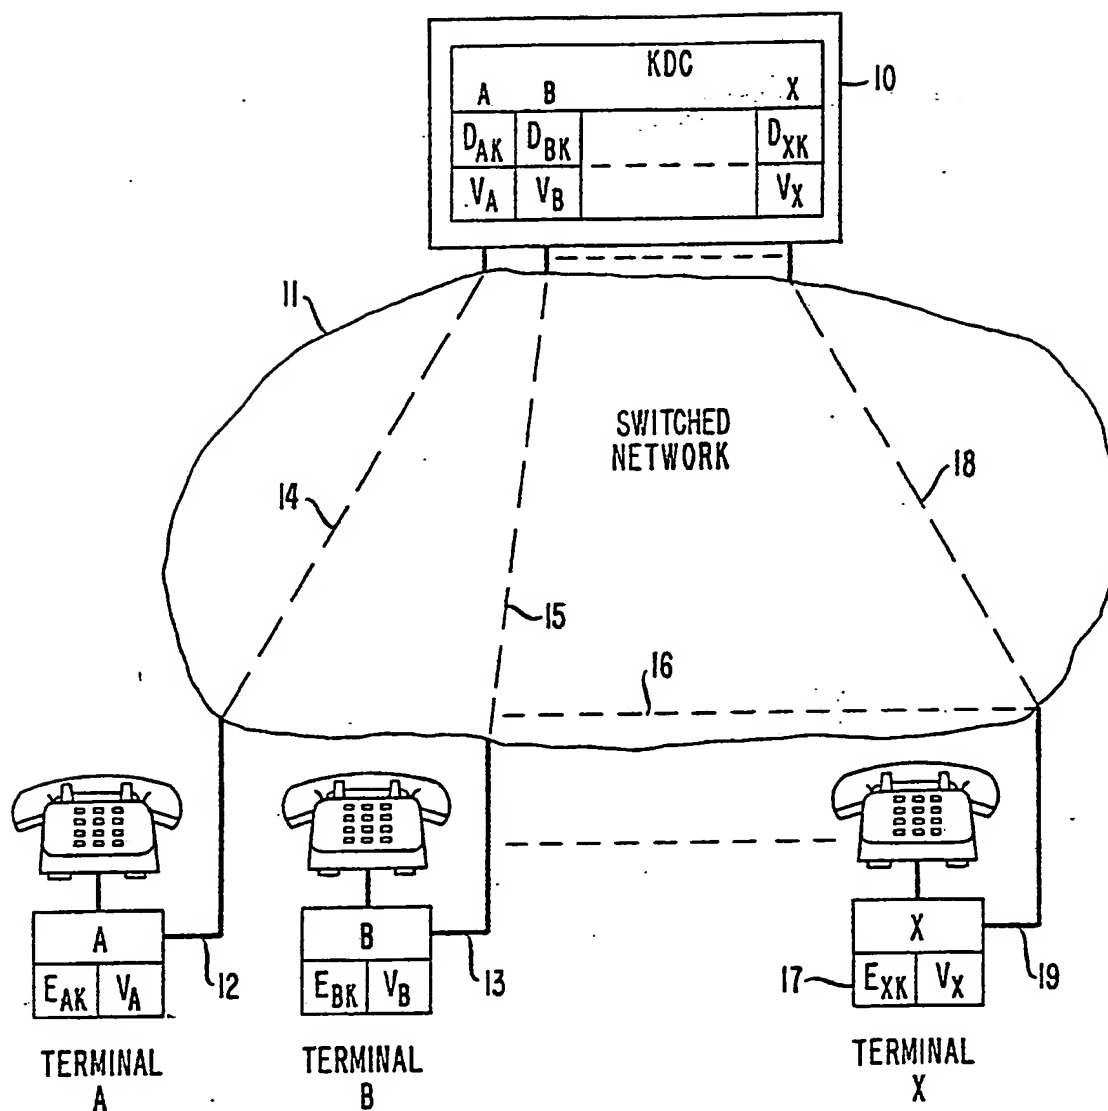

2/17


FIG. 2

## INITIAL SYSTEM SETUP

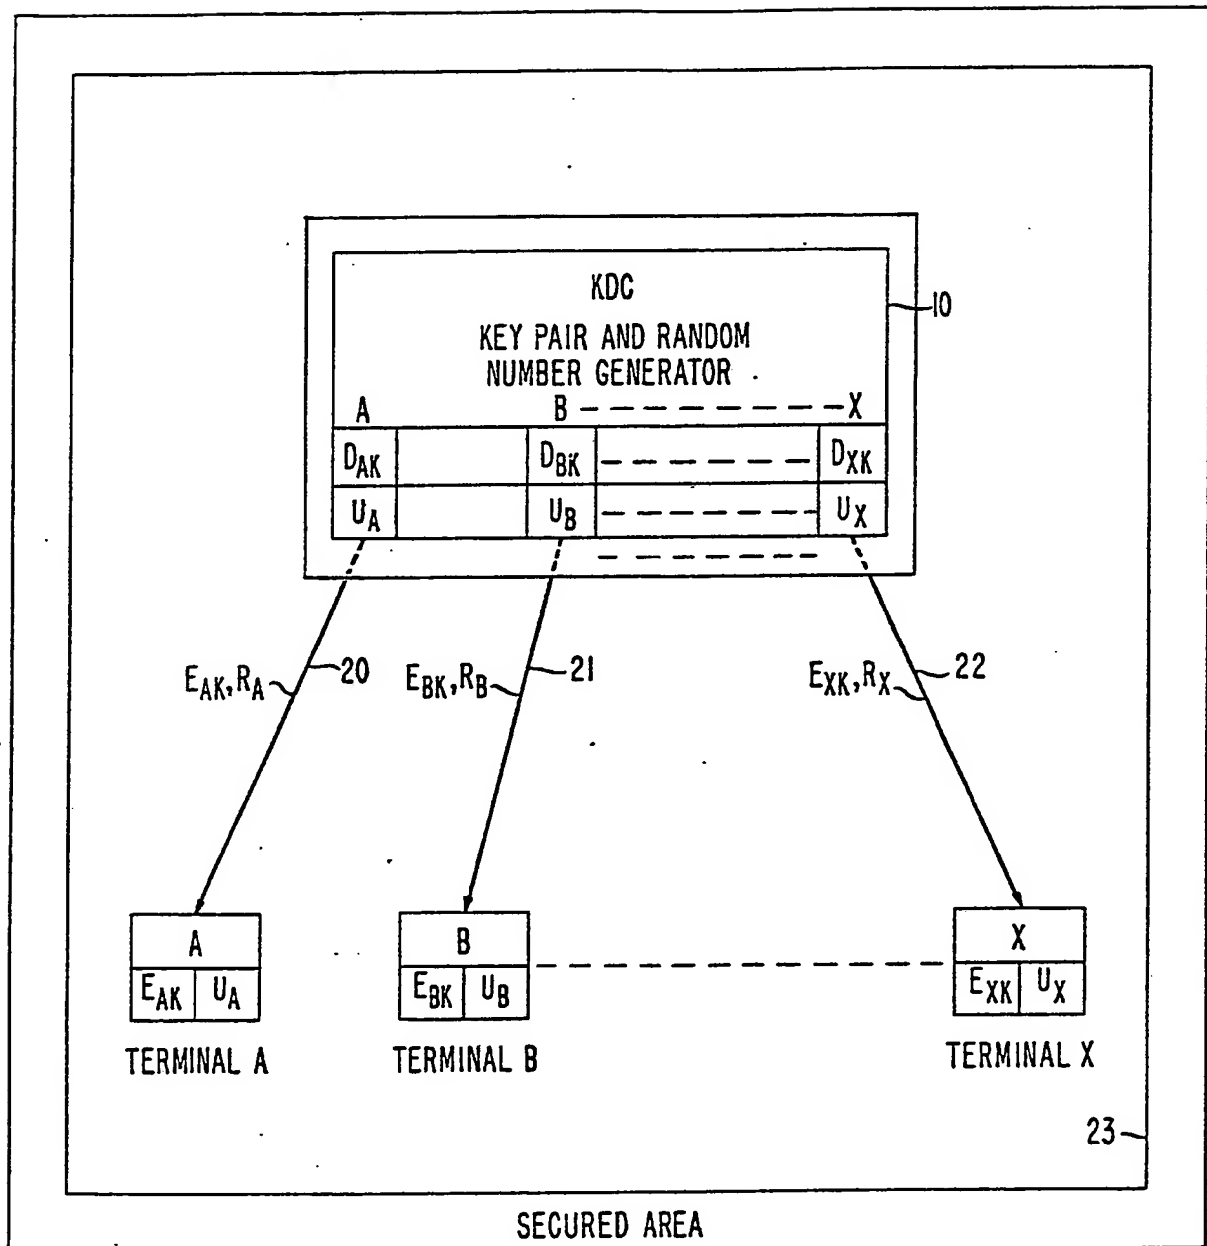

3/17


**FIG. 3**  
TERMINAL A

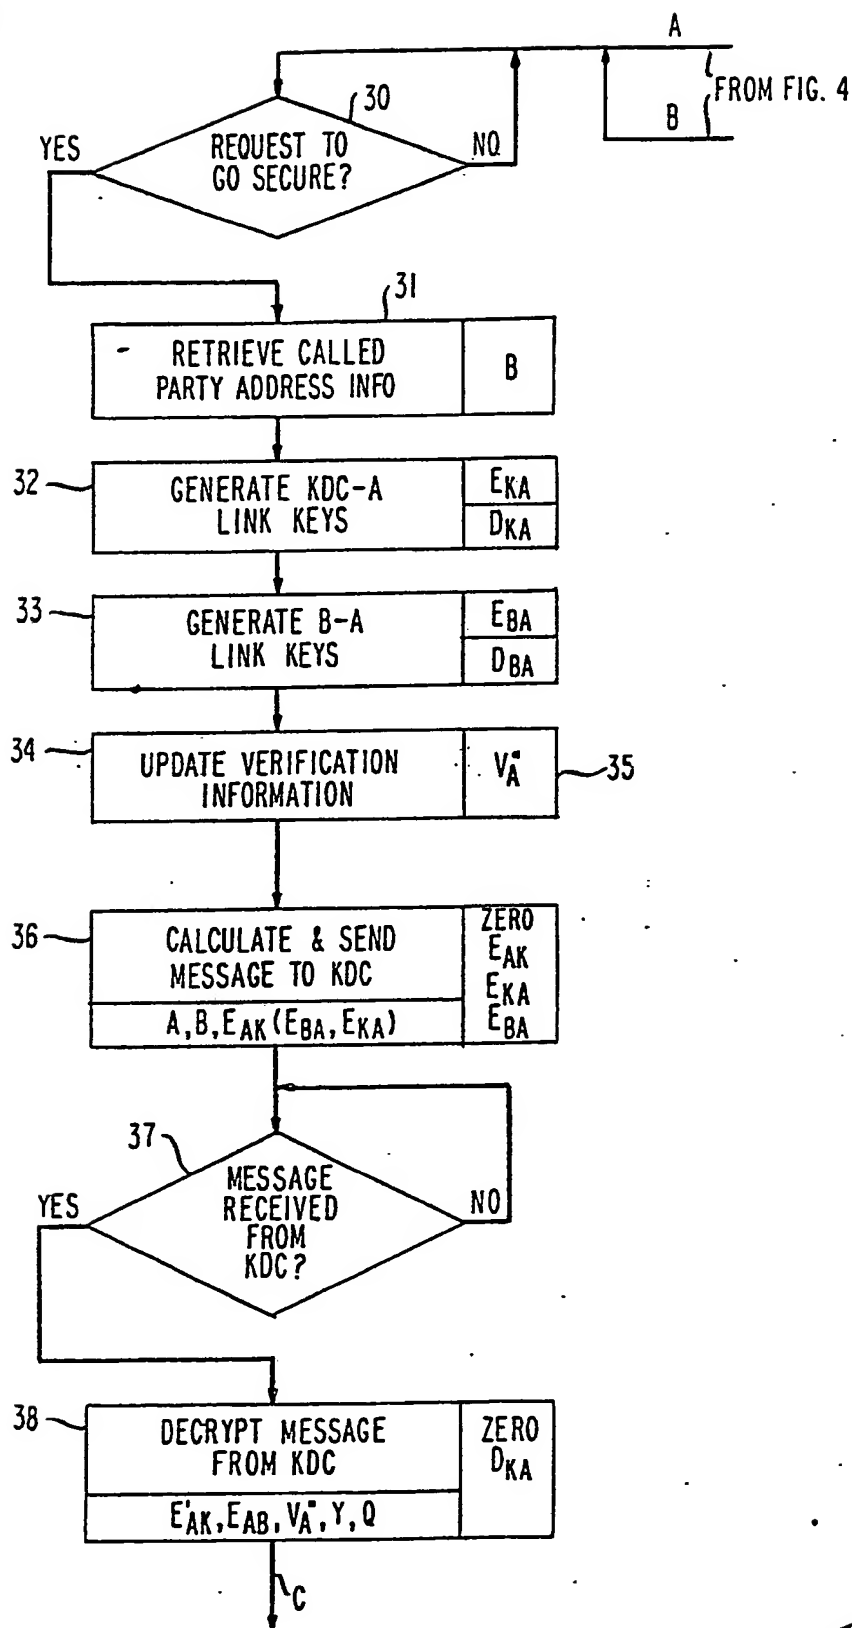

TO FIG. 4


4/17

**FIG. 4**  
TERMINAL A


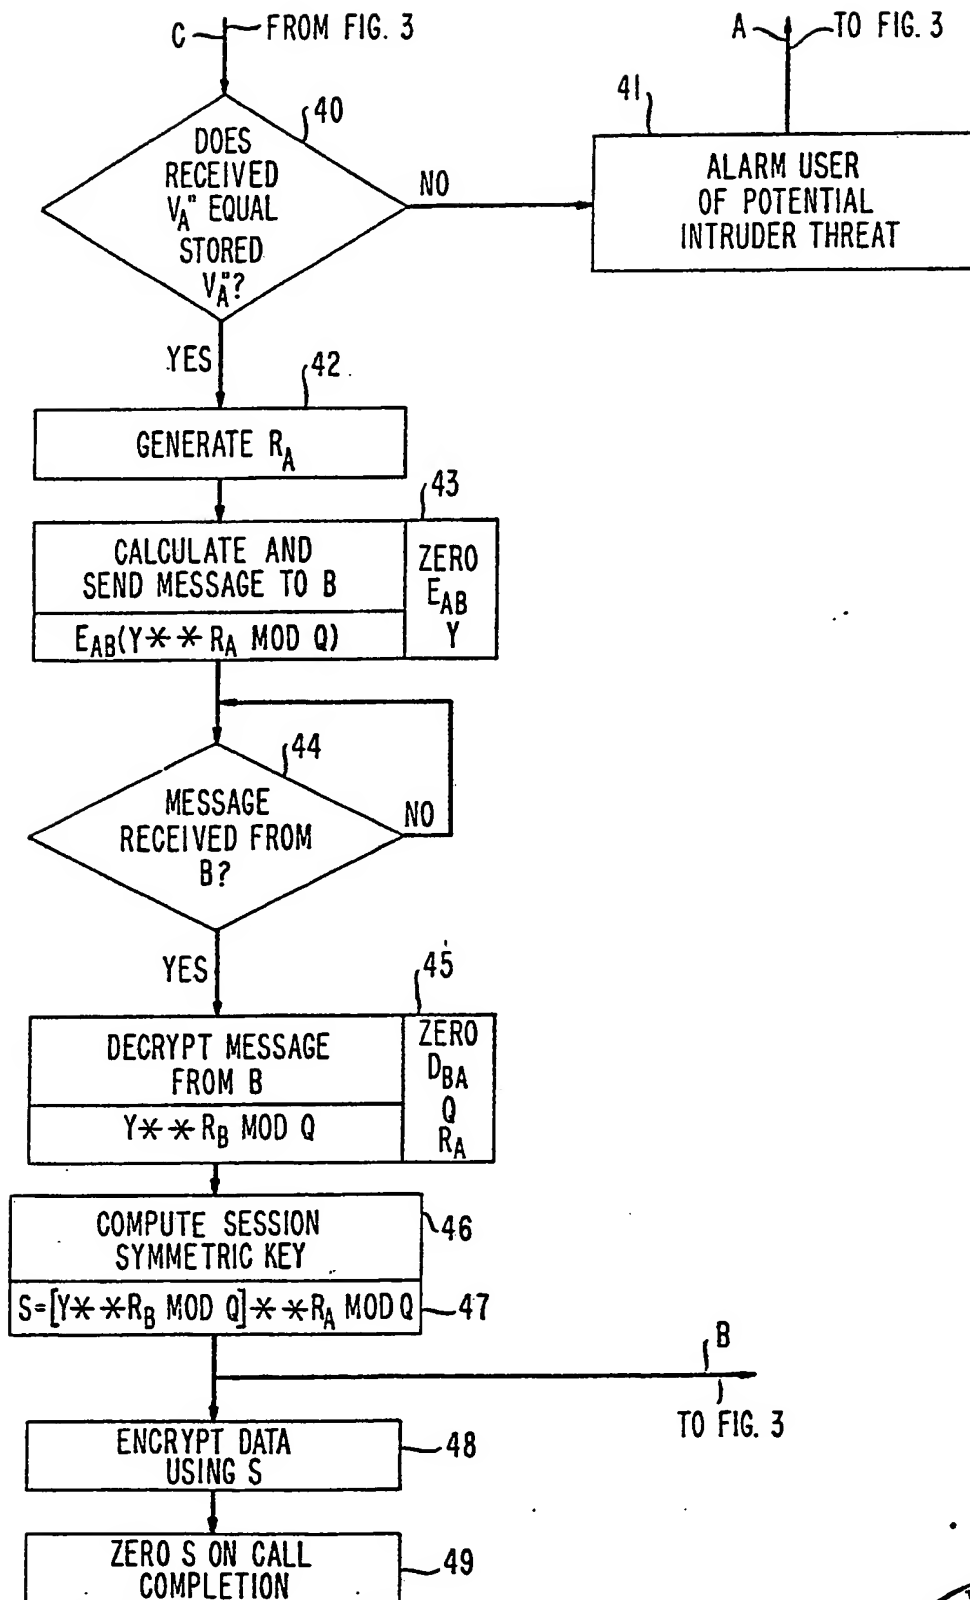






**FIG. 5**  
KDC

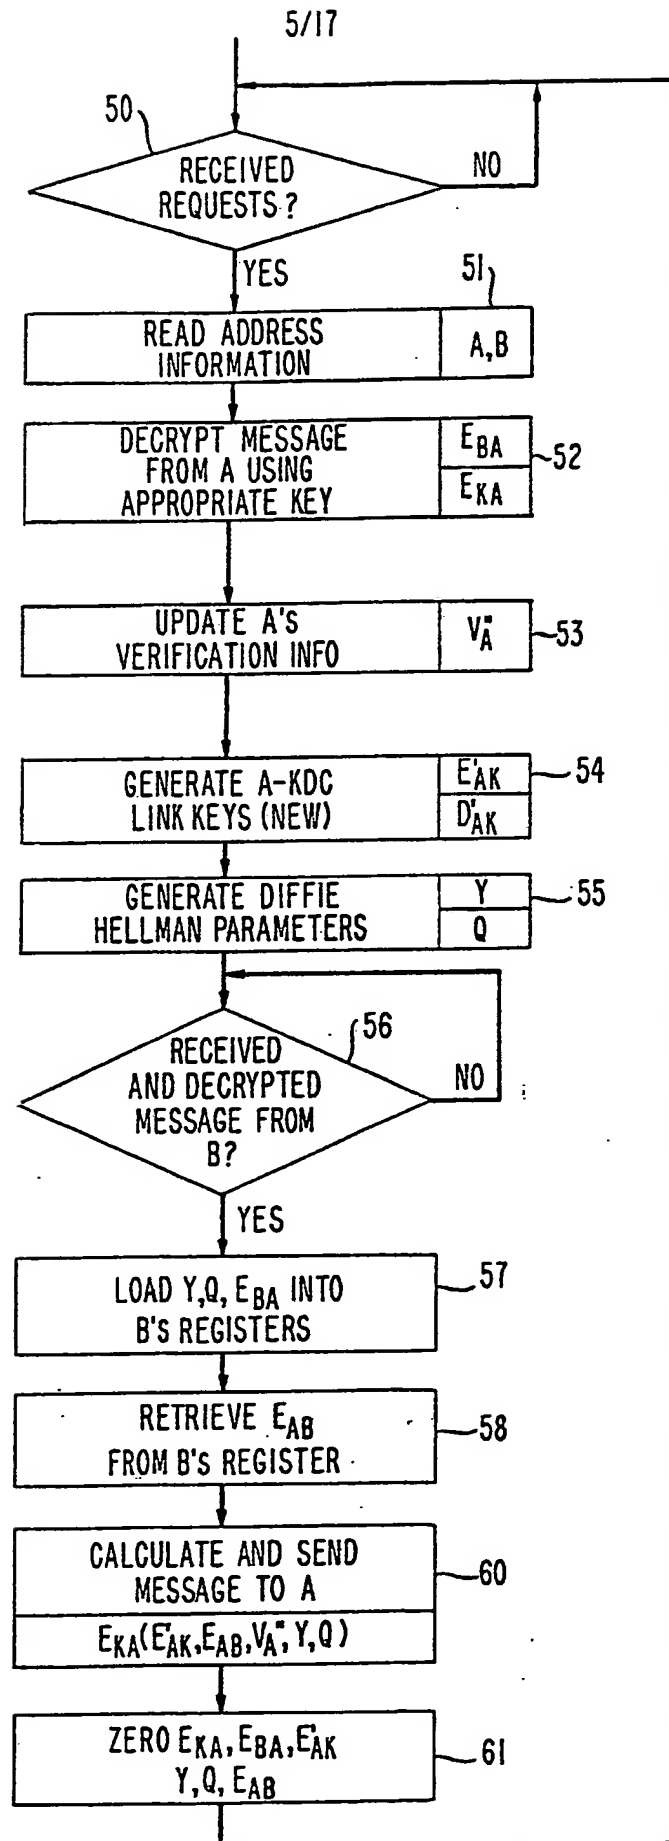

6/17

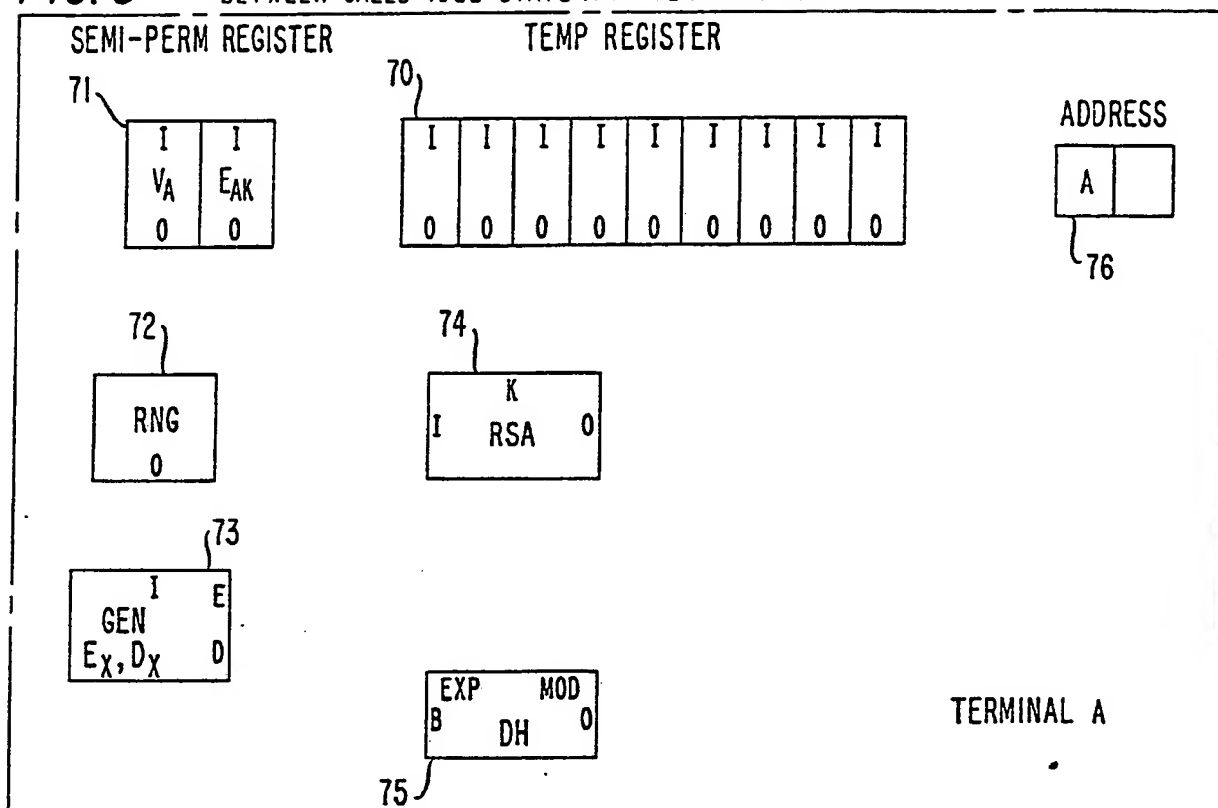
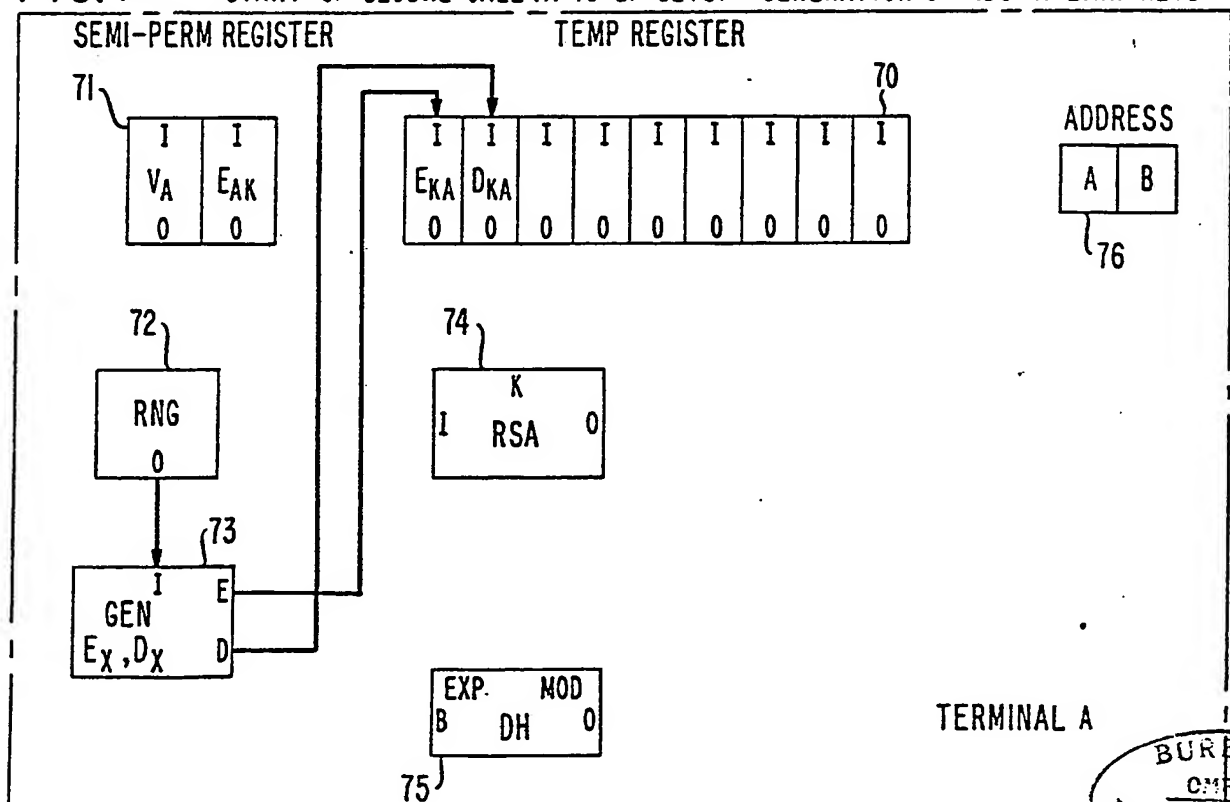
**FIG. 6** BETWEEN CALLS IDLE STATE (FOR TERMINAL A)**FIG. 7** START OF SECURE CALL (A TO B) SETUP - GENERATION OF KDC-A LINK KEYSBUREAU  
OMPI

7/17

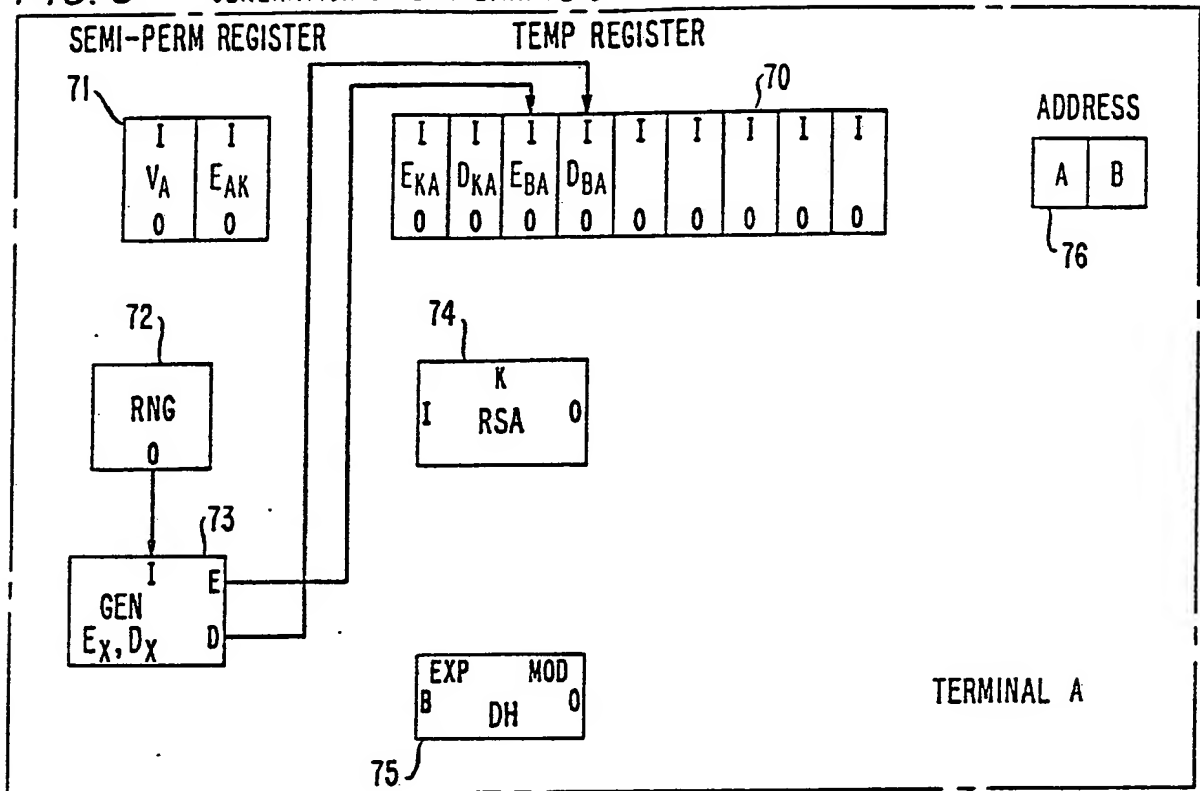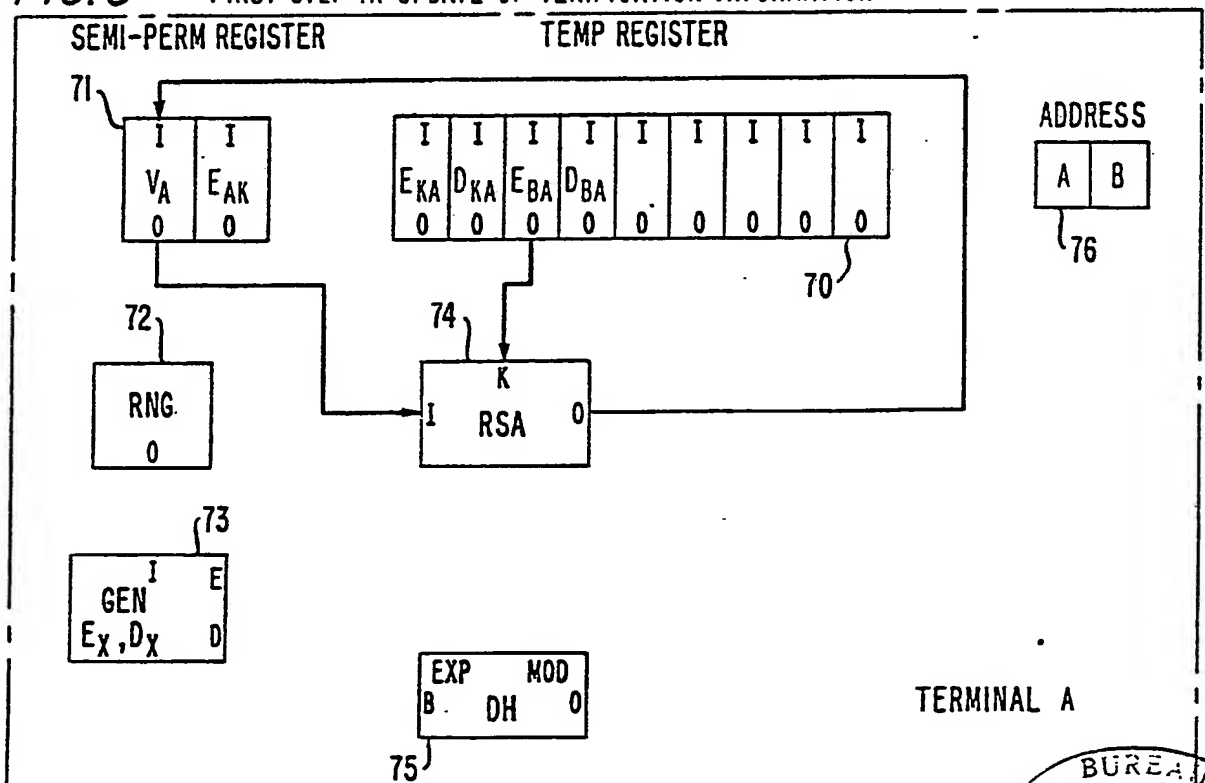**FIG. 8** GENERATION OF B-A LINK KEYS**FIG. 9** FIRST STEP IN UPDATE OF VERIFICATION INFORMATION

BUREAU

8/17

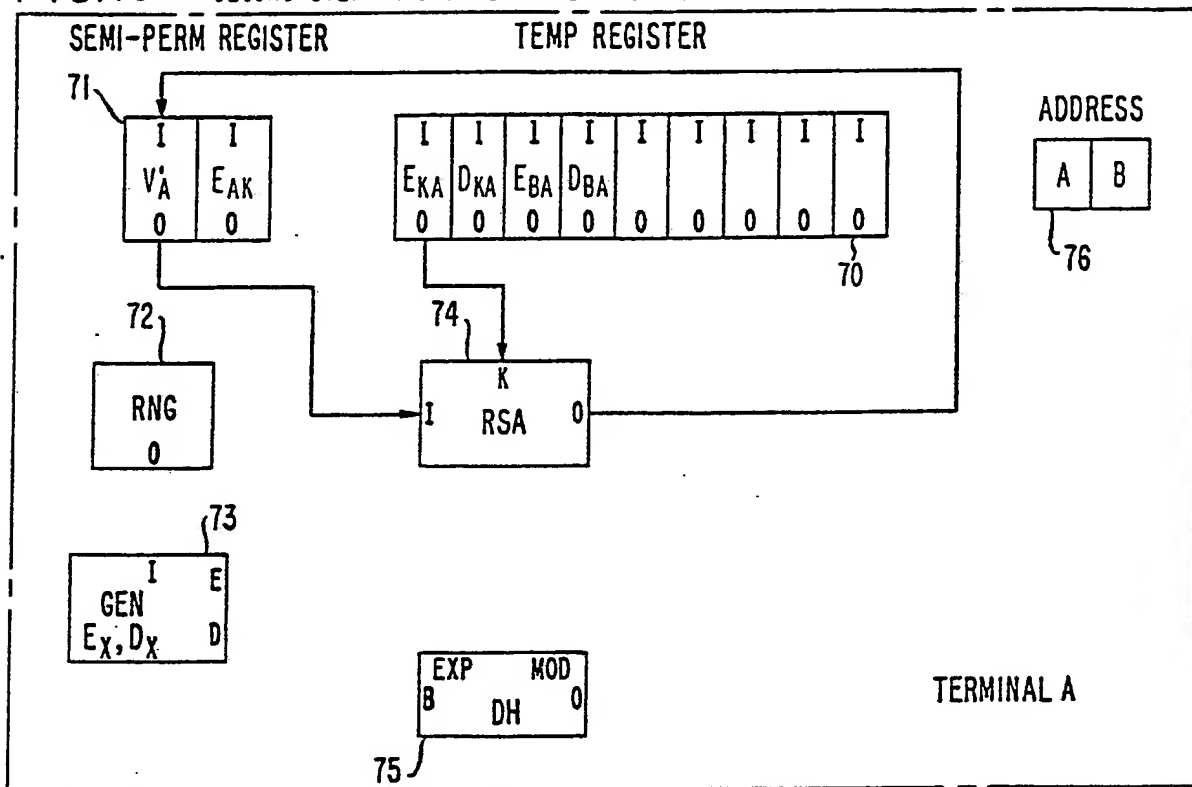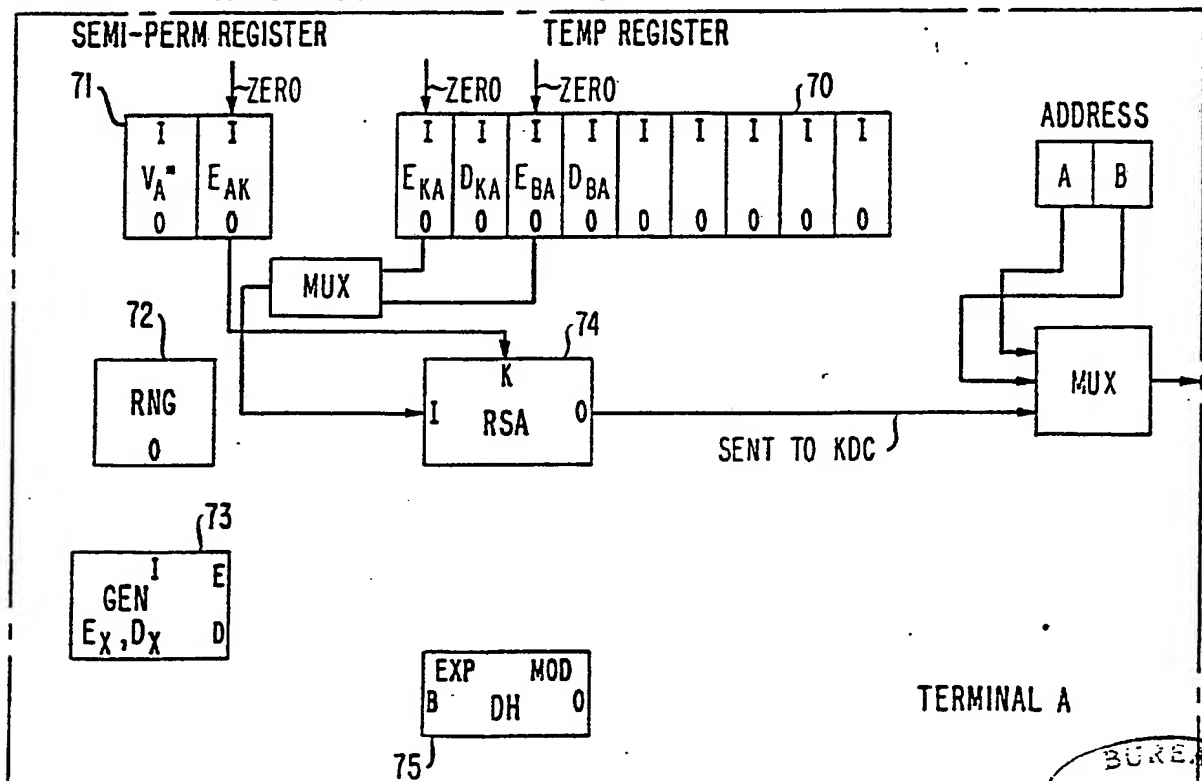**FIG. 10** SECOND STEP IN UPDATE OF VERIFICATION INFORMATION**FIG. 11** COMPUTATION OF A-KDC MESSAGE

BUREAU

9/17

FIG. 12 IDLE STATE WHILE WAITING FOR RETURN MESSAGE FROM KDC


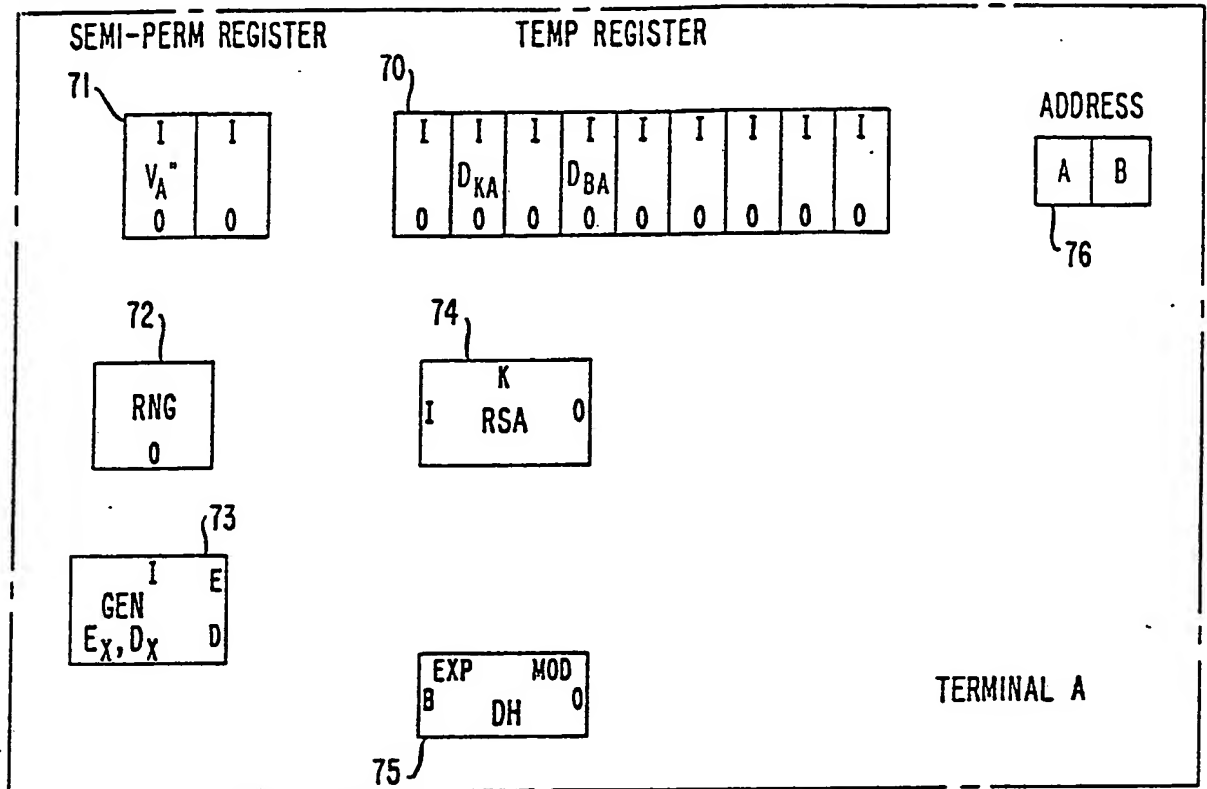


FIG. 13 DECRYPTION OF RETURN MESSAGE FROM KDC

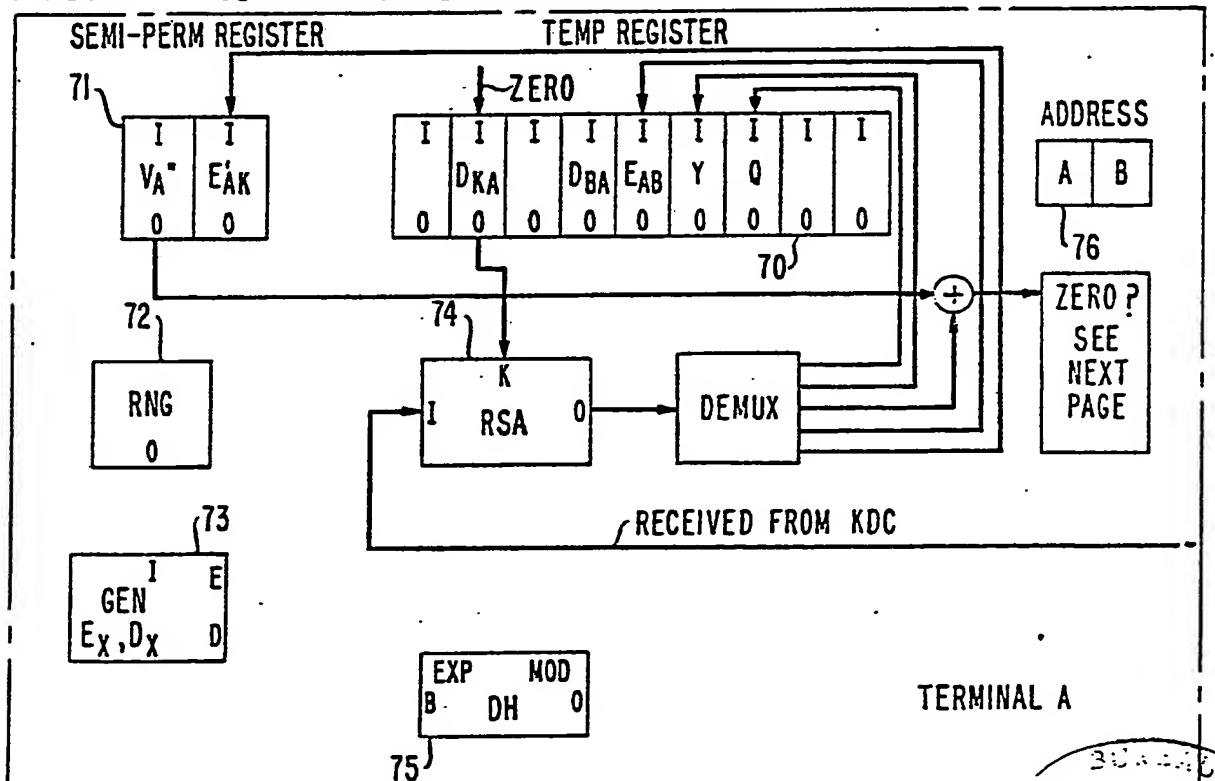

10/17

FIG. 14 VERIFICATION CHECK



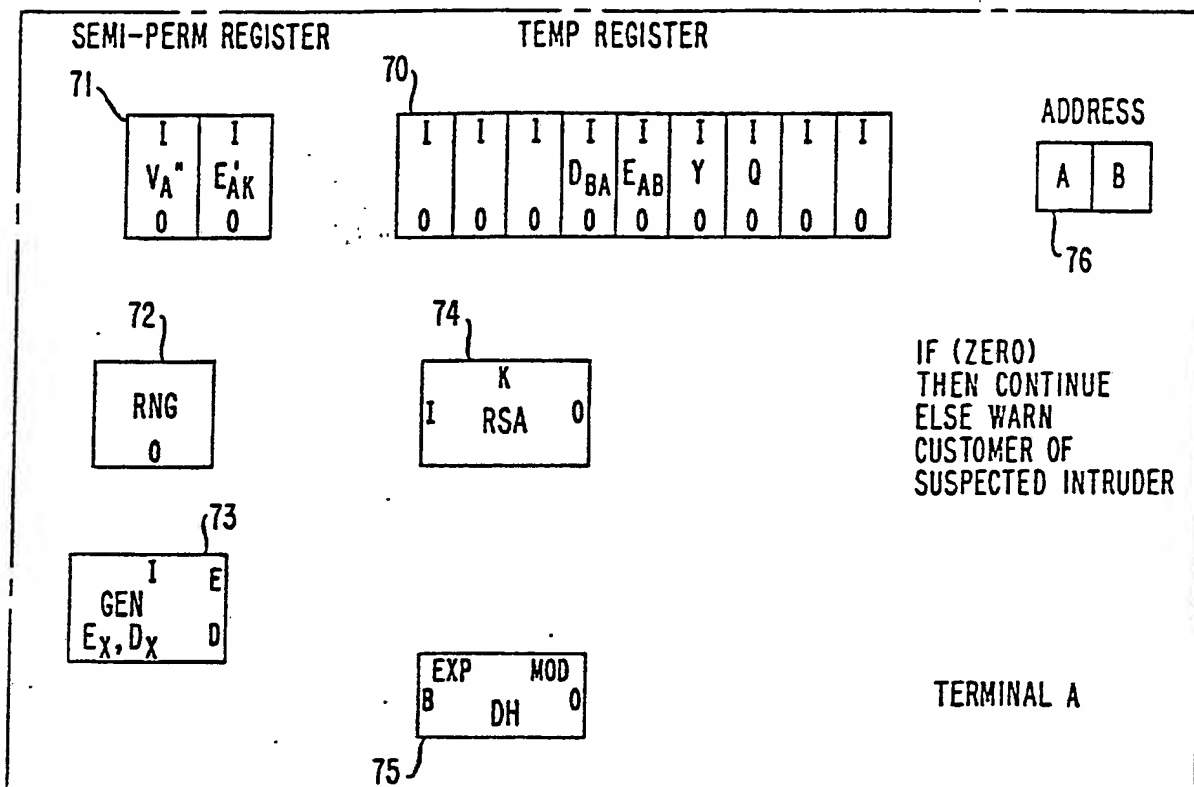


FIG. 15 START OF KEY EXCHANGE WITH B CALCULATION OF DIFFIE-HELLMAN KEYS

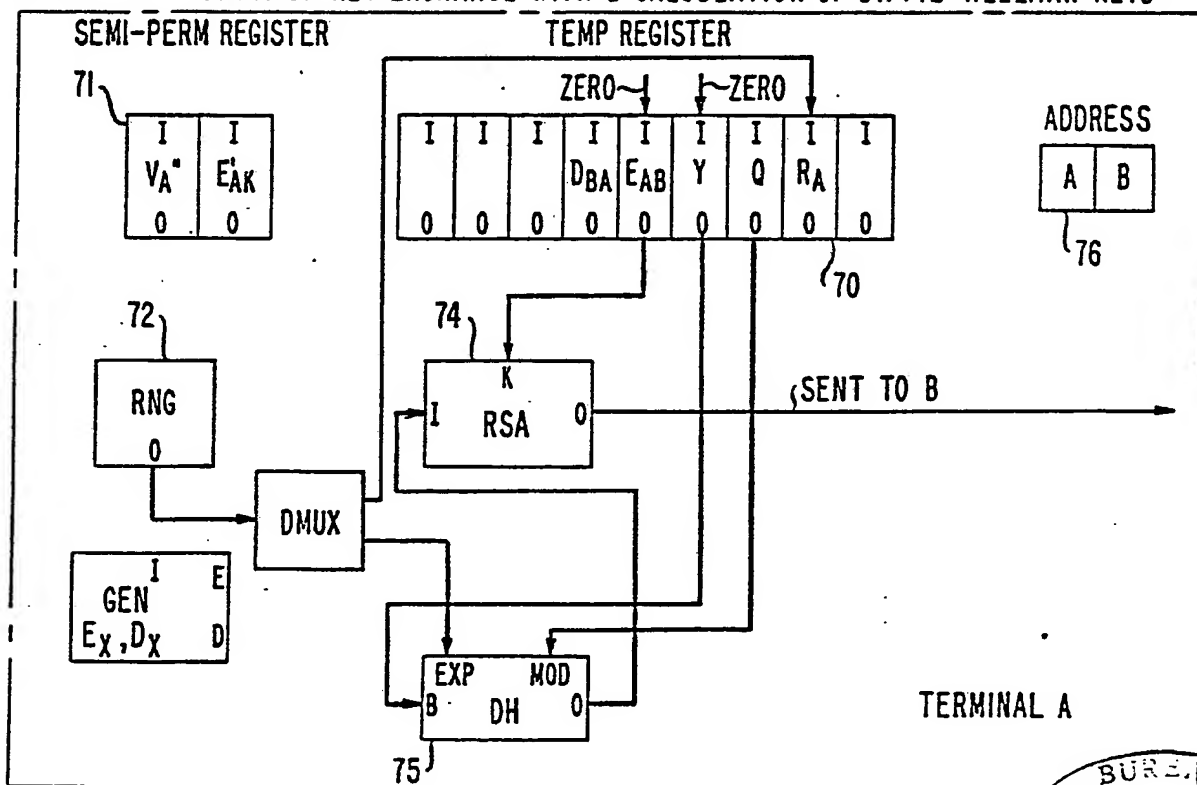


BUREAU



11/17  
**FIG. 16** IDLE WAIT STATE FOR RETURN MESSAGE FROM B

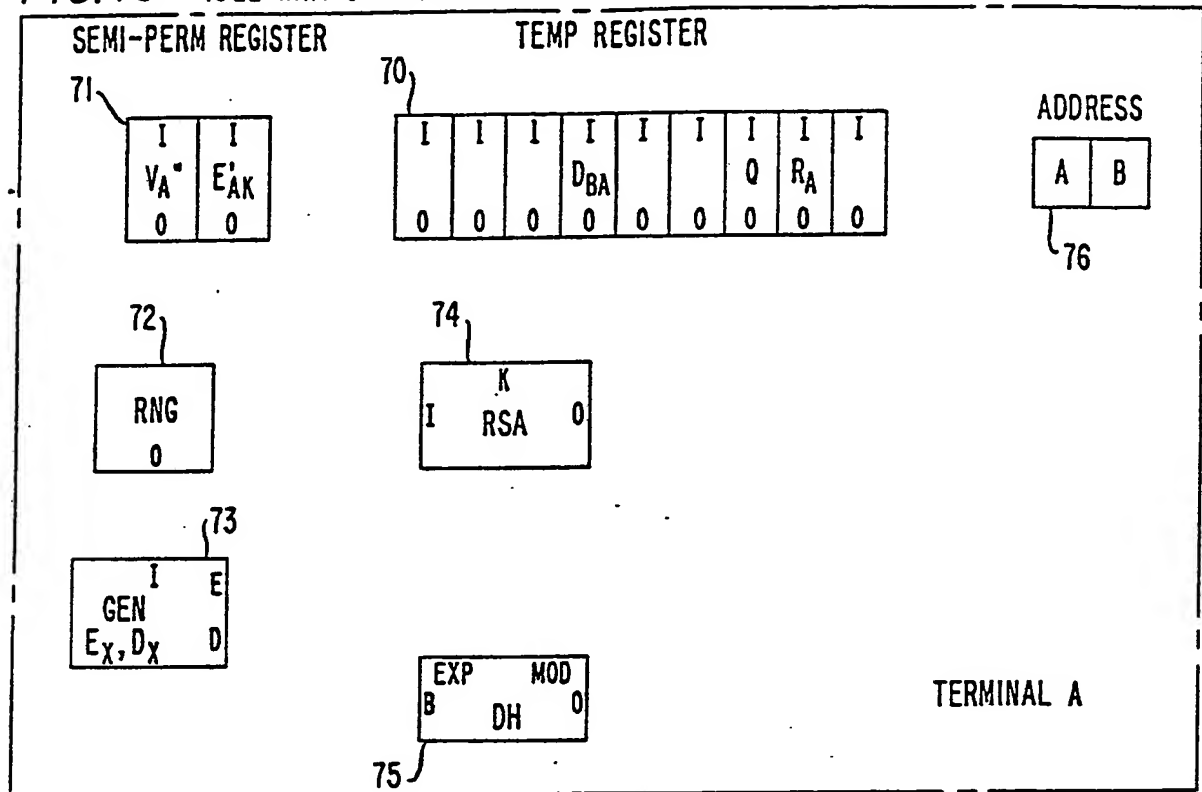

**FIG. 17** DECRYPTION OF MESSAGE FROM B AND CALCULATION OF SESSION KEY-S

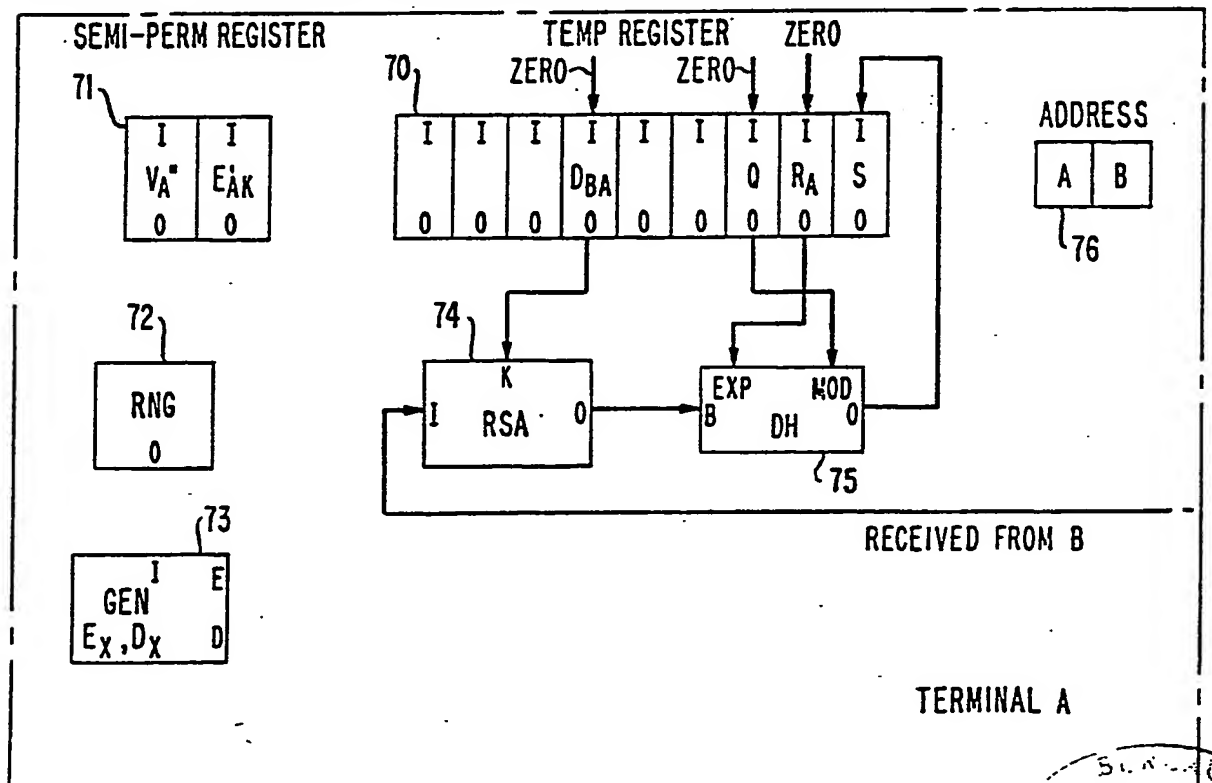

12/17

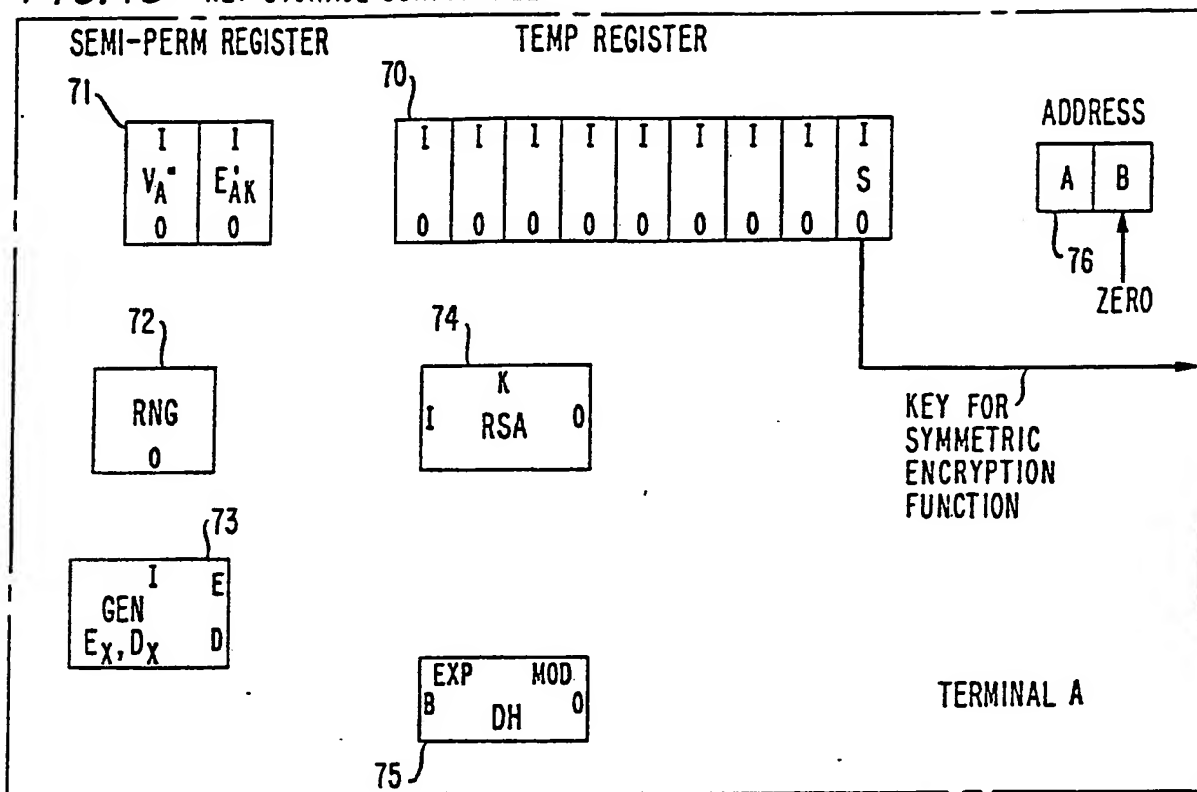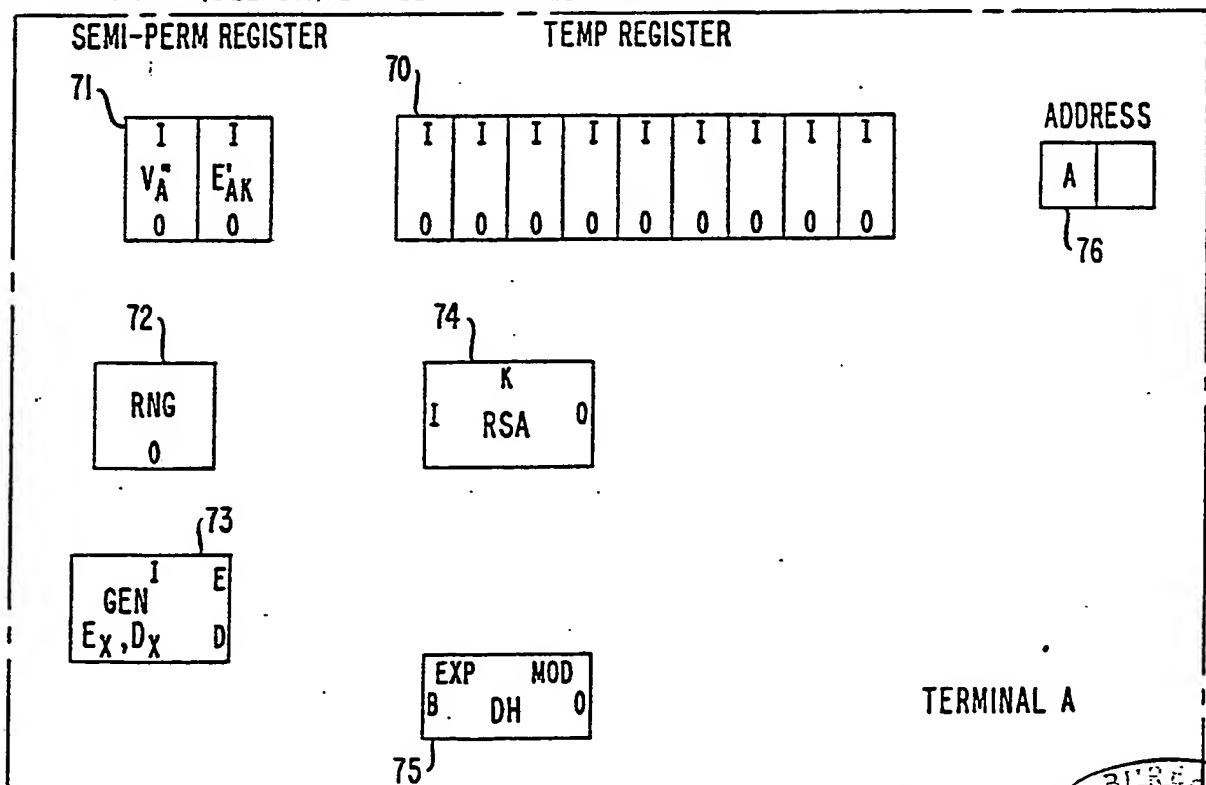**FIG. 18** KEY STORAGE DURING CALL**FIG. 19** IDLE STATE FOLLOWING CALL COMPLETION



13/17

FIG. 20 IDLE STATE BETWEEN CALLS


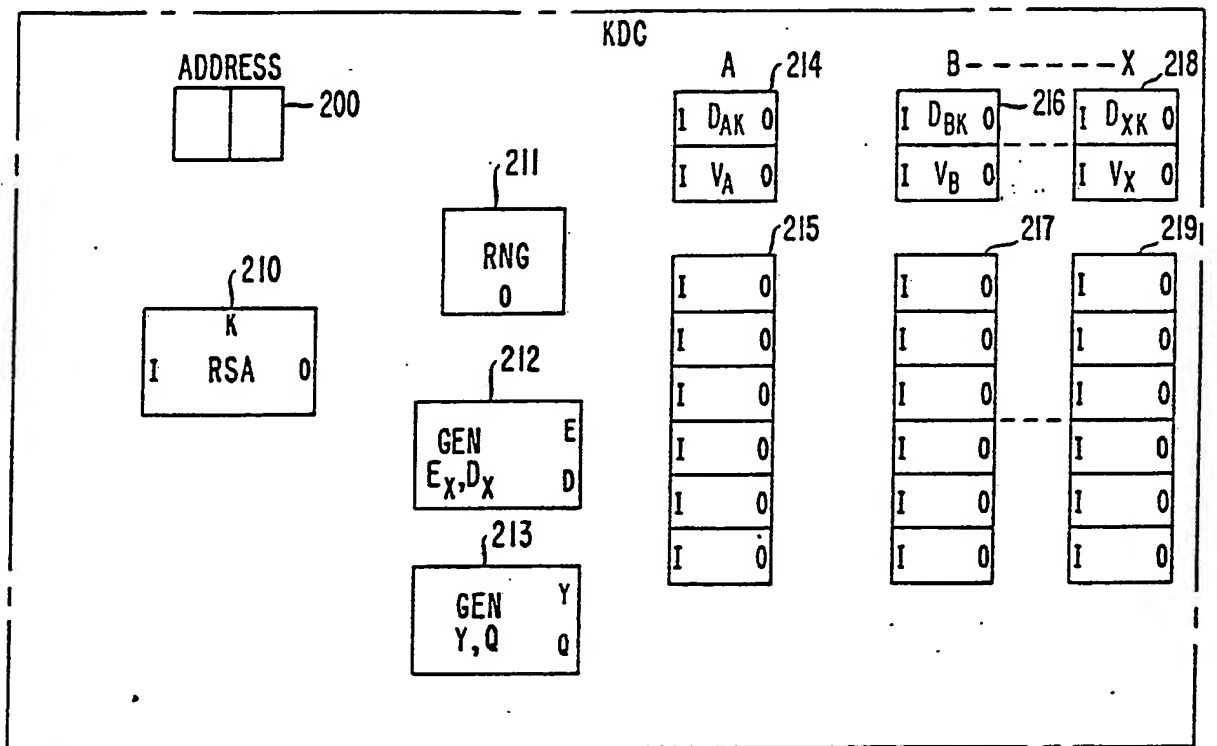


FIG. 21 DECRYPTION OF MESSAGE FROM A

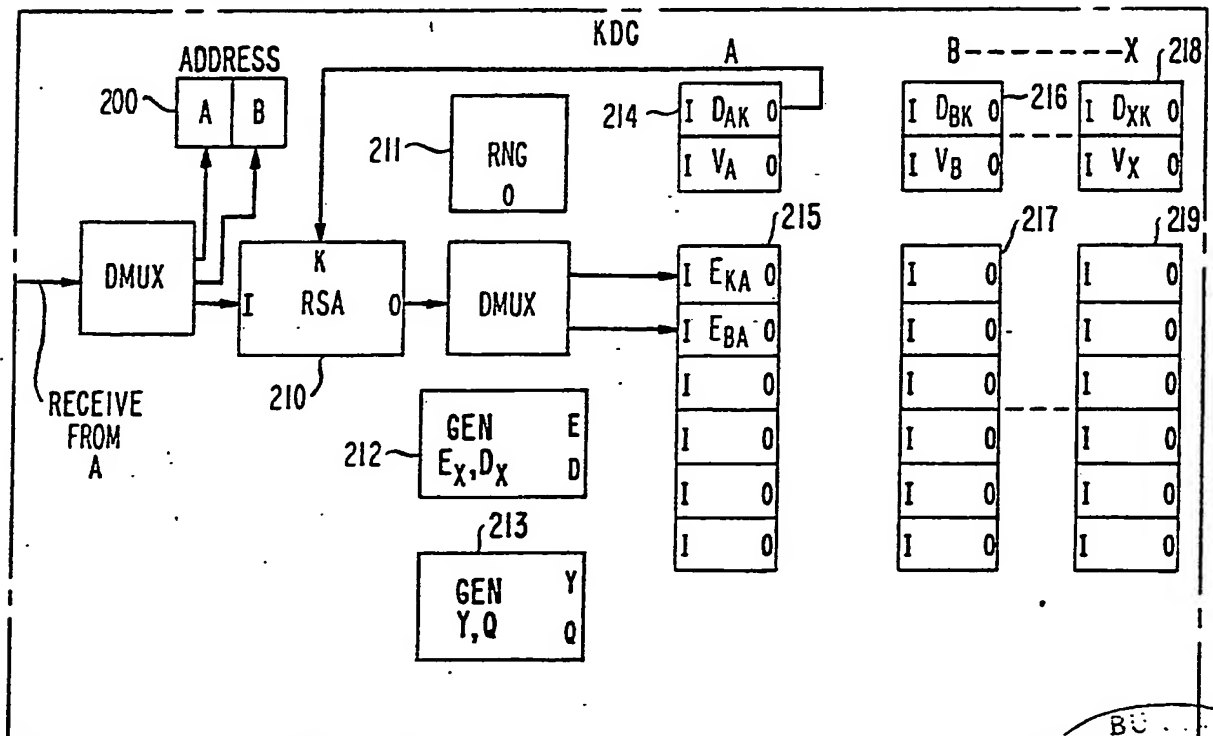

14/17

FIG. 22 FIRST STEP IN THE UPDATE OF VERIFICATION INFORMATION




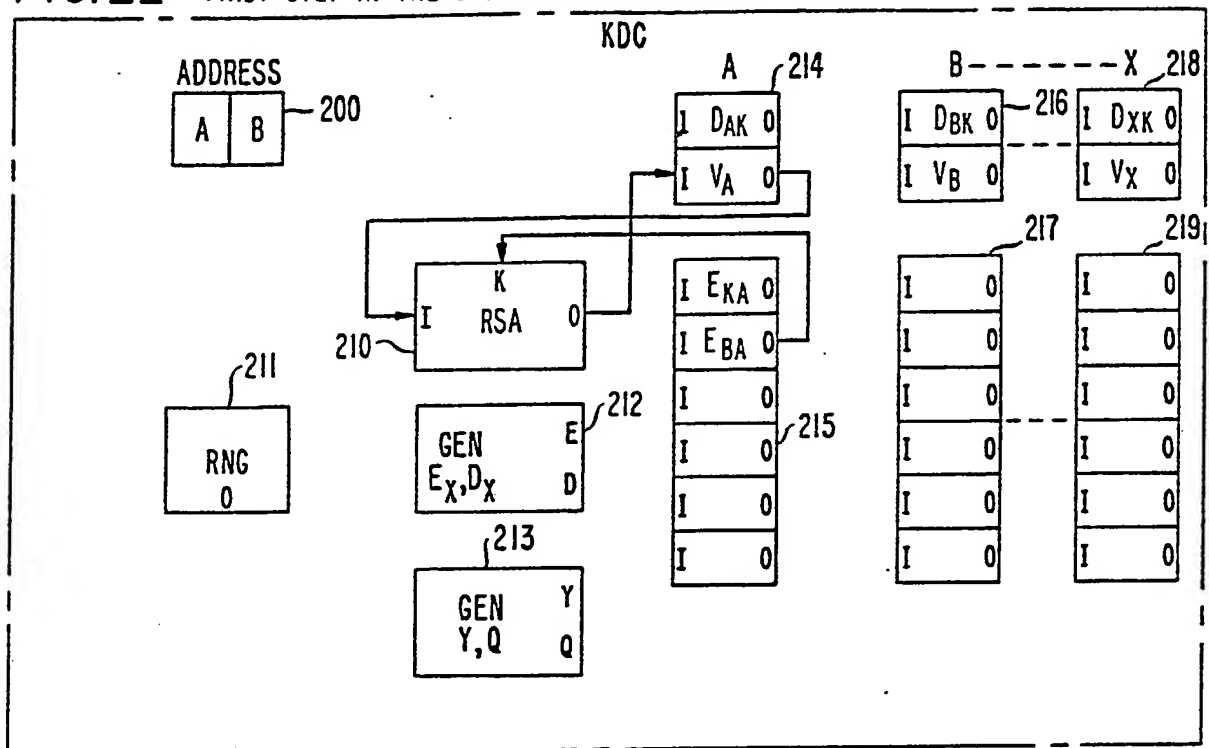


FIG. 23 SECOND STEP IN THE UPDATE OF VERIFICATION INFORMATION

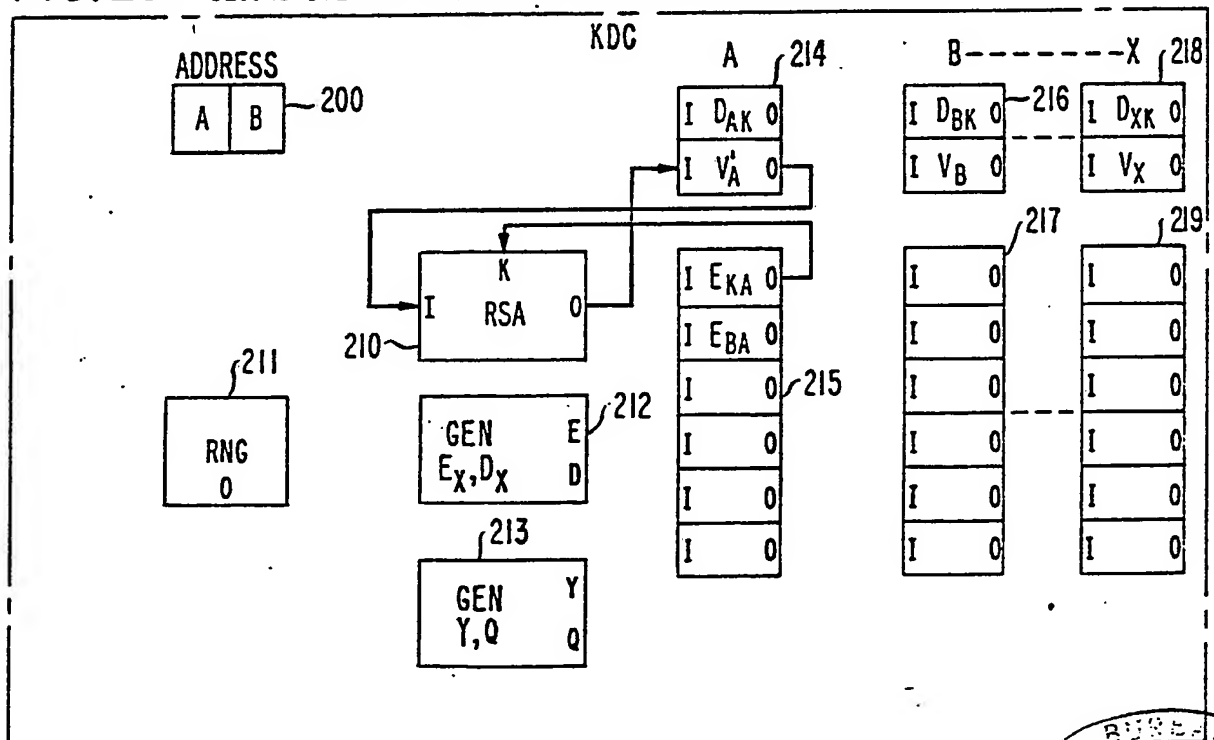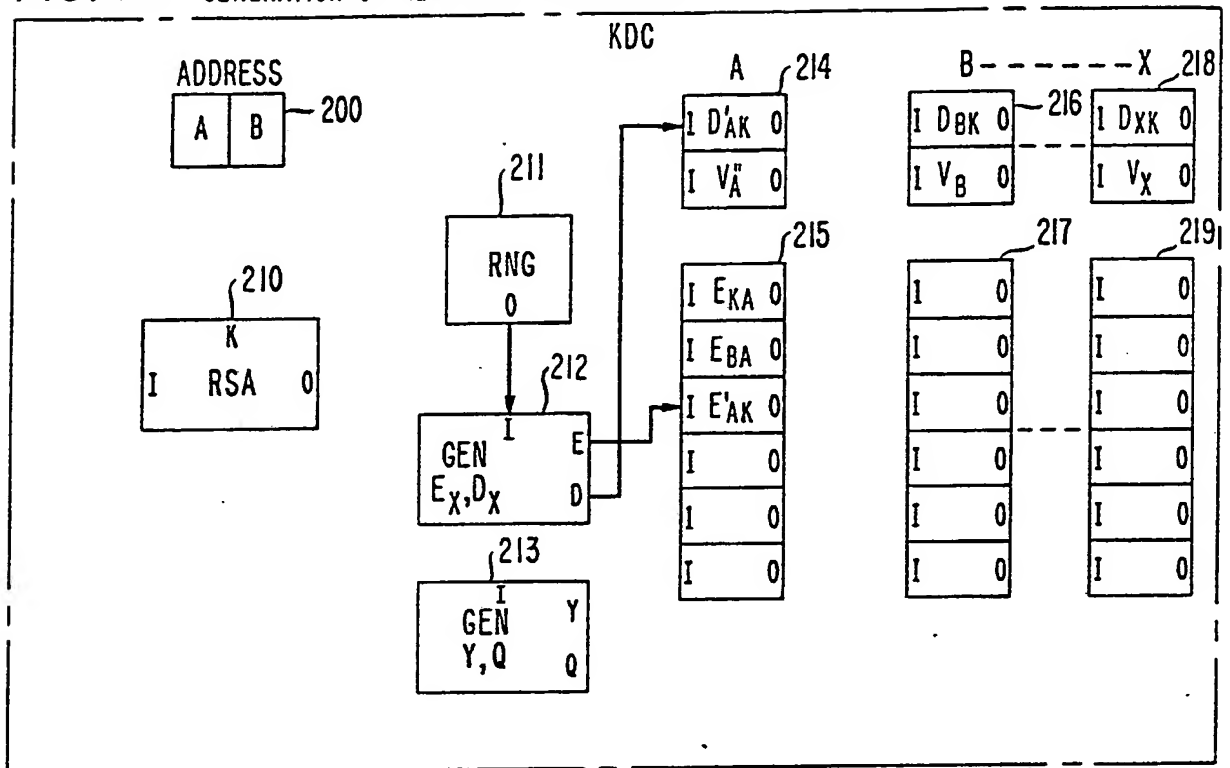


15/17

**FIG. 24** GENERATION OF NEW KDC-A LINK KEYS**FIG. 25** GENERATION OF DIFFIE-HELLMAN ALGORITHM PARAMETERS

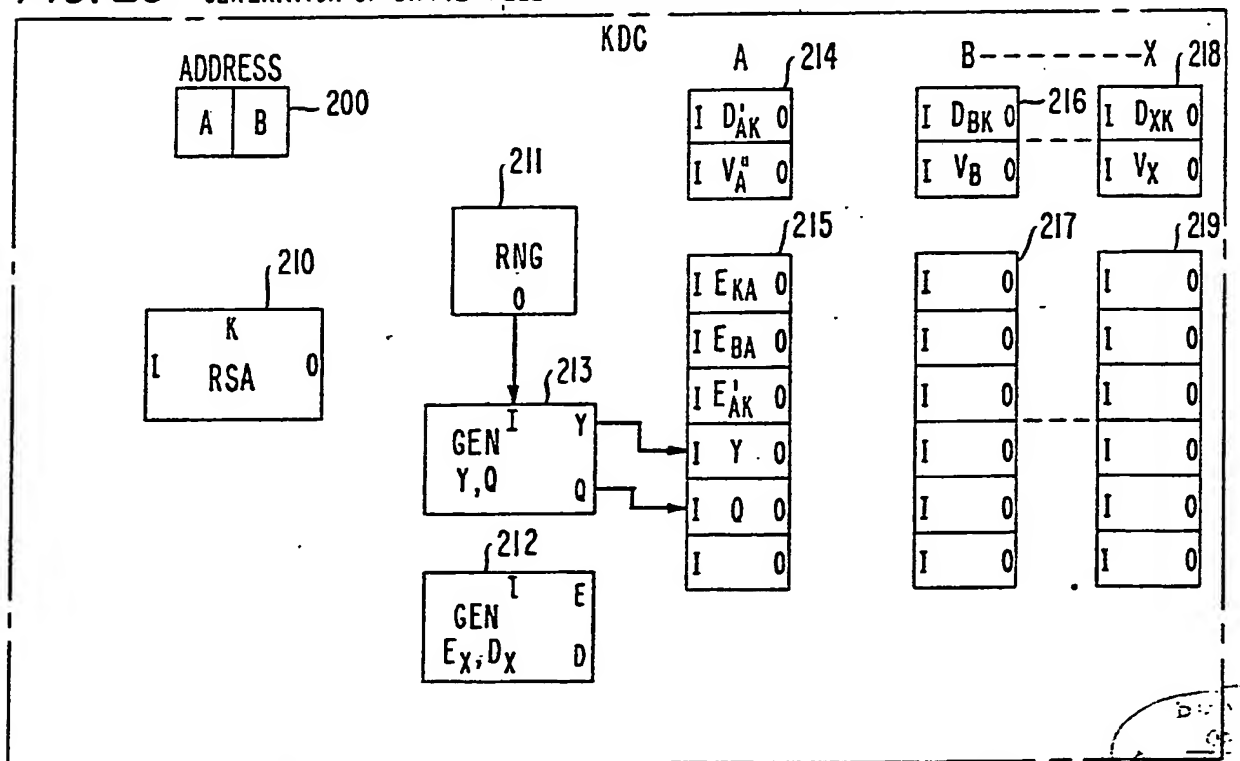

17/17

FIG. 28 IDLE STATE BETWEEN CALLS

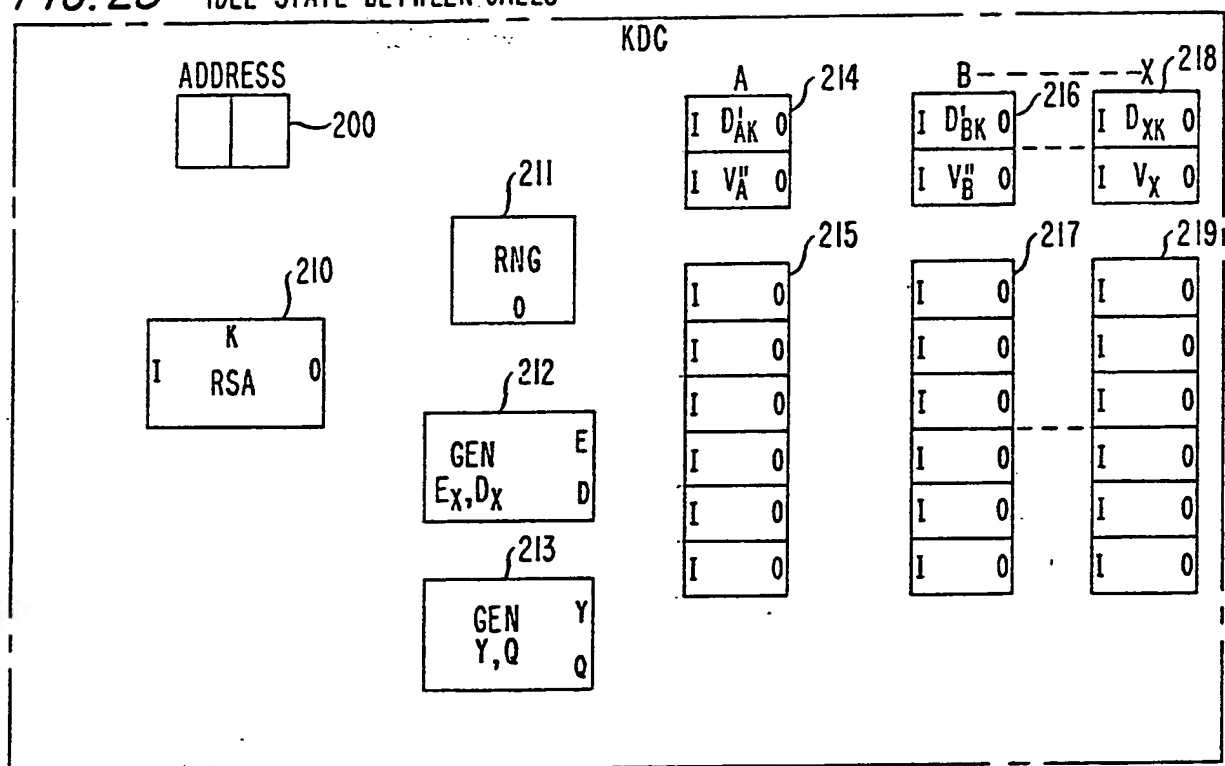

# INTERNATIONAL SEARCH REPORT

International Application No. PCT/US 83/00030

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (If several classification symbols apply, indicate all) <sup>3</sup> According to International Patent Classification (IPC) or to both National Classification and IPC IPC <sup>3</sup> :        H 04 L 9/00																				
<b>II. FIELDS SEARCHED</b> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Minimum Documentation Searched <sup>4</sup></div> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 25%; border-bottom: 1px solid black;">Classification System</th> <th style="border-bottom: 1px solid black;">Classification Symbols</th> </tr> <tr> <td style="border-right: 1px solid black; padding: 5px; vertical-align: top;">IPC<sup>3</sup></td> <td style="padding: 5px; vertical-align: top;">H 04 L 9/00; H 04 L 9/02; H 04 K 1/00; H 04 L 9/04</td> </tr> </table> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>5</sup></div>			Classification System	Classification Symbols	IPC <sup>3</sup>	H 04 L 9/00; H 04 L 9/02; H 04 K 1/00; H 04 L 9/04														
Classification System	Classification Symbols																			
IPC <sup>3</sup>	H 04 L 9/00; H 04 L 9/02; H 04 K 1/00; H 04 L 9/04																			
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT</b> <sup>14</sup> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 10%; border-bottom: 1px solid black;">Category <sup>6</sup></th> <th style="border-bottom: 1px solid black;">Citation of Document, <sup>15</sup> with indication, where appropriate, of the relevant passages <sup>17</sup></th> <th style="width: 10%; border-bottom: 1px solid black;">Relevant to Claim No. <sup>18</sup></th> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">EP, A1, 0048903 (LICENTIA) 7 April 1982 see page 2, line 23 - page 4, line 22 --</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1,2</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">US, A, 4182933 (ROSENBLUM) 8 January 1980 see column 7, lines 1-21; column 8, lines 37-50; column 11, lines 17-41 cited in the application --</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">DATAMATION, vol. 22, no. 8, August 1976 (Barrington, US) Sykes: "Protecting data by encryption", pages 81-85, see page 84, left-hand column, lines 23-42 --</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">IBM-Technical Disclosure Bulletin, vol. 22, no. 2, July 1979 (New York, US) Lennon et al.: "Composite cryptographic session keys for enhanced communication security", pages 643-646, see page 643, first line to page 644, line 8 --</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1,2</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">Fifth International Conference on Digital Satellite Communications, 23-26 March 1981 (New York, US) Bic et al.: --</td> <td style="text-align: center; vertical-align: top; padding: 5px;">./.</td> </tr> </table>			Category <sup>6</sup>	Citation of Document, <sup>15</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. <sup>18</sup>	A	EP, A1, 0048903 (LICENTIA) 7 April 1982 see page 2, line 23 - page 4, line 22 --	1,2	A	US, A, 4182933 (ROSENBLUM) 8 January 1980 see column 7, lines 1-21; column 8, lines 37-50; column 11, lines 17-41 cited in the application --	1	A	DATAMATION, vol. 22, no. 8, August 1976 (Barrington, US) Sykes: "Protecting data by encryption", pages 81-85, see page 84, left-hand column, lines 23-42 --	1	A	IBM-Technical Disclosure Bulletin, vol. 22, no. 2, July 1979 (New York, US) Lennon et al.: "Composite cryptographic session keys for enhanced communication security", pages 643-646, see page 643, first line to page 644, line 8 --	1,2	A	Fifth International Conference on Digital Satellite Communications, 23-26 March 1981 (New York, US) Bic et al.: --	./.
Category <sup>6</sup>	Citation of Document, <sup>15</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. <sup>18</sup>																		
A	EP, A1, 0048903 (LICENTIA) 7 April 1982 see page 2, line 23 - page 4, line 22 --	1,2																		
A	US, A, 4182933 (ROSENBLUM) 8 January 1980 see column 7, lines 1-21; column 8, lines 37-50; column 11, lines 17-41 cited in the application --	1																		
A	DATAMATION, vol. 22, no. 8, August 1976 (Barrington, US) Sykes: "Protecting data by encryption", pages 81-85, see page 84, left-hand column, lines 23-42 --	1																		
A	IBM-Technical Disclosure Bulletin, vol. 22, no. 2, July 1979 (New York, US) Lennon et al.: "Composite cryptographic session keys for enhanced communication security", pages 643-646, see page 643, first line to page 644, line 8 --	1,2																		
A	Fifth International Conference on Digital Satellite Communications, 23-26 March 1981 (New York, US) Bic et al.: --	./.																		
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p><sup>9</sup> Special categories of cited documents: <sup>16</sup></p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"A" document member of the same patent family</p> </div> </div>																				
<b>IV. CERTIFICATION</b> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border-bottom: 1px solid black; padding: 5px;">           Date of the Actual Completion of the International Search <sup>8</sup>  <div style="text-align: center;">20th April 1983</div> </td> <td style="width: 50%; border-bottom: 1px solid black; padding: 5px;">           Date of Mailing of this International Search Report <sup>9</sup>  <div style="text-align: center; font-size: 1.2em;">03 MAI 1983</div> </td> </tr> <tr> <td style="border-bottom: 1px solid black; padding: 5px;">           International Searching Authority <sup>1</sup>  <div style="text-align: center;">EUROPEAN PATENT OFFICE</div> </td> <td style="border-bottom: 1px solid black; padding: 5px;">           Signature of Authorized Officer <sup>10</sup>  <div style="text-align: right;">               G.L.M. Wydenberg           </div> </td> </tr> </table>			Date of the Actual Completion of the International Search <sup>8</sup> <div style="text-align: center;">20th April 1983</div>	Date of Mailing of this International Search Report <sup>9</sup> <div style="text-align: center; font-size: 1.2em;">03 MAI 1983</div>	International Searching Authority <sup>1</sup> <div style="text-align: center;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <sup>10</sup> <div style="text-align: right;">               G.L.M. Wydenberg           </div>														
Date of the Actual Completion of the International Search <sup>8</sup> <div style="text-align: center;">20th April 1983</div>	Date of Mailing of this International Search Report <sup>9</sup> <div style="text-align: center; font-size: 1.2em;">03 MAI 1983</div>																			
International Searching Authority <sup>1</sup> <div style="text-align: center;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <sup>10</sup> <div style="text-align: right;">               G.L.M. Wydenberg           </div>																			

FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

"Privacy over digital satellite links", pages 243-249, see page 246, right-hand column, lines 32-43; page 247, left-hand column, lines 6-11; figure 3

-----

1

V. ☐ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE <sup>10</sup>

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers \_\_\_\_\_, because they relate to subject matter <sup>12</sup> not required to be searched by this Authority, namely:

2. ☐ Claim numbers \_\_\_\_\_, because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out <sup>13</sup>, specifically:

VI. ☐ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING <sup>11</sup>

This International Searching Authority found multiple inventions in this international application as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.

2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:

3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:

4. ☐ As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

Remark on Protest

- ☐ The additional search fees were accompanied by applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.